

Fixing systems **FOR PHOTOVOLTAIC MODULES**



About the company



Who are we?

Durability and safety. The highest quality of products. A unique offer of personalized mountings for photovoltaic modules. These are the key values on which the operations of Energy5 are based. Being a leading producer and designer of photovoltaic structures, we apply a strategy based on providing products of the highest quality, along with innovative and tested solutions. We are a pioneer of research on photovoltaic structures – in particular related to their corrosivity. We rely on experience, our staff consists of qualified engineers, operators and specialists.



A WIDE RANGE OF PV SYSTEMS:
free-standing, roof, facade, autobox
systems



INDIVIDUAL
construction
projects



CORROSION-RESISTANT SYSTEMS,
owing to the metallic
coating



PRODUCTS CERTIFIED
by the Building Research
Institute

We've been
operating since

2015

We employ over

150

people

We have registered

45

designs at the European
Union Office

We have

1300 MW

of annual production capacity

We offer over

300

commodity indexes

We have served over

3000

customers

We issue an average of

6000

invoices a year

We have planted

700

trees

We have been an
award winner





Modern MACHINE POOL



2 PRODUCTION ESTABLISHMENTS
in central Poland



7 AUTOMATED LINES,
originating from leading
manufacturers



3200 M²
of manufacturing areas



SIZE CUSTOMIZED
manufacturing

► Comprehensive studies

To ensure the required safety in use, we create ready to use fixing systems for photovoltaic modules, testing all connecting elements in the set. The conducted tests confirm the declared level of performance characteristics, required by law for construction products of this type.



► The highest standard

With our experience, innovative technology and cooperation with leading research and scientific centres, our products meet the highest standards, while they maintain certificates, standards and approvals required by the Polish law.

GRYFIT LAB





Tests AND CERTIFICATES

Products certified by the NATIONAL TECHNICAL ASSESSMENT

The document authorizes to use in trading and in the construction industry on the domestic market.



Factory production control

All products undergo internal control of the production process in order to monitor its quality level.



National Technical Assessment

The range of functional and operational features of the Energy5 structure is much wider than that required by the range of the EN-1090-1 standard.



Security Certificate. Controlled production

Energy5 products have a certificate issued by TÜV Rheinland, an independent entity, internationally recognized. It does confirm the highest quality and safety of products.



Certification of Factory Production Control

Energy5's products have certificates of conformity awarded to the Factory Production Control pursuant to the EN 1090-1,2,3 standard



Occupational Health and Safety System
in compliance with ISO 45001:2018 standard



Environmental Management System
in compliance with ISO 14001:2015 standard



Quality Management Systems
in compliance with ISO 9001:2015 standard



Tests AND CERTIFICATES

The technical features of the Energy5 structure are confirmed by TYPE tests carried out at the Building Research Institute in the scope of:


- Product classification in terms of their shape and dimensions, for conformance with PN-EN 755-9:2010.
- Classification of aluminium profiles according to their durability, in accordance with PN-EN 1999-1-1:2011.
- Classification of steel sections in the environment of the corrosion class up to C5 pursuant to PN-EN ISO 12944-2: 2018 standard.
- Connections strength.
- PV panels loading, including their supporting structure.
- System strength on a flat roof in the aerodynamic tunnel.
- Strength of the Aero S and Aero EW systems glued or welded to be covered with a membrane in the aerodynamic tunnel.



Tests AND CERTIFICATES

Additional Energy5 tests, crucial for the safety and durability of the photovoltaic system:

- Shear and tensile strength of connections - inter alia related to hammer screws setting in the channels of aluminum or steel profiles.
- Resistance of PV panels together with the structure in terms of the load of wind and snow impact.
- Forces transmitted by middle and end mounting clamps.
- Resistance of the set to an impact of a soft - heavy or hard - light body.
- Durability of the whole set, depending on the corrosive class of the environment.
- The weight of the sets, which is very important when testing roof load.

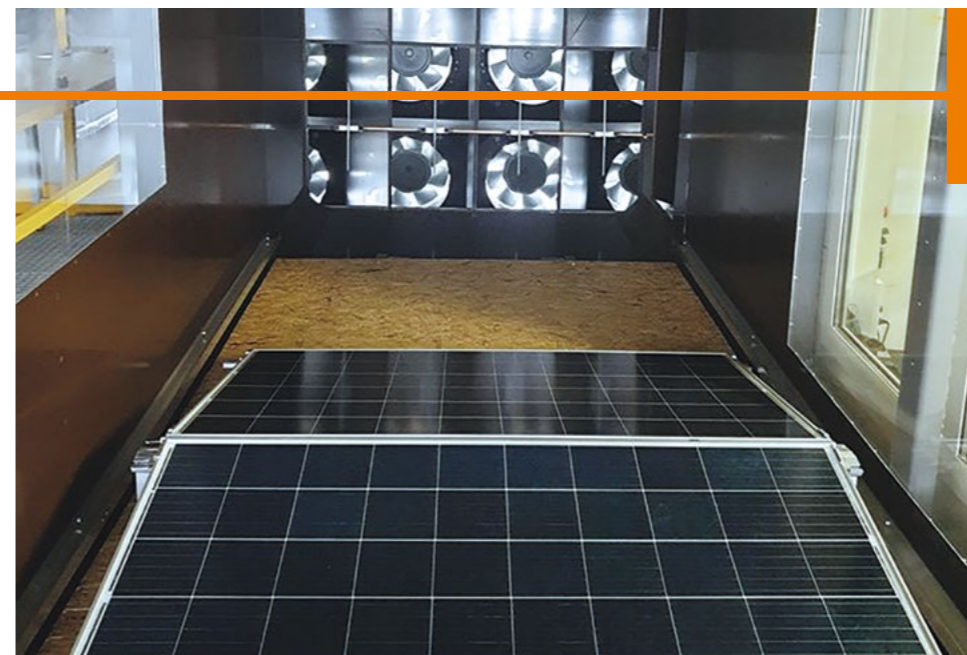



Freestanding SYSTEMS



► What the freestanding systems are?

The freestanding systems are overground structures, enabling installation of over a dozen PV modules in household installations, up to hundreds of thousands modules at huge photovoltaic power plants, generating impressive amounts of energy.

► Individual approach

The systems proposed by us are selected individually, taking into account the **shape of a terrain, geotechnical conditions, and wind and snow zones in a specific location**. We manufacture structures for modules with an aluminium frame, as well as for glass-glass or bifacial modules. We provide a support of well-qualified specialists from a design to a final installation.



a guarantee for the systems
for up to 25 years



**different
table inclines**



**vertical or horizontal
layout of the modules**



structures adopted to
glass-glass and bifacial modules

► Extensive range

We offer pile driving services, including **pull out tests for structural piles**, required for a correct installation of the structure.

► Safety guarantee

We make all efforts possible to ensure that systems designed by us not only **reduce monthly electricity bills, but are also safe**. We perform tests of all connecting elements in the system, guaranteeing **the long-term reliability** and **smooth operation**.

► Resistance to corrosion

To ensure correct protection against corrosion, the overground Energy5 systems are made of black steel, S320, coated with the metallic coat Magnelis®. The coating is characterised by its significantly **higher resistance to corrosion**, when compared to galvanised products. This innovative coating guarantees a long-term protection against corrosion in aggressive environmental conditions, up to the corrosion class C5, and this translates into the increased life of the photovoltaic systems.





Freestanding
SYSTEMS



Photovoltaic tracker
TR/V1/R or TR/V1/K

The Energy5 photovoltaic tracker is a single axis, fully unmanned system that follows the sun. It allows modules to be mounted in a single row up to a maximum length of 98 m.


- It stands out with yields up to 30% higher than still PV structures. Exceptional efficiency of the solar system is ensured by the sun-tracking feature, which aligns the PV modules optimally to the direction of sunrays.
- The system is controlled through an astronomical clock, while the system security is provided by smart sensors and a weather station that measures wind strength and direction. When the critical values are exceeded, the system automatically forces the panels into the preferred safe position.
- The Energy5 tracking system is also equipped with snowfall or rainfall sensors. When heavy precipitation is detected, the trackers go into automatic snow removal / panel cleaning mode and angle the structures to allow snow to slide off or the structures to be cleaned.

PHOTOVOLTAIC TRACKER SYSTEM SPECIFICATION:

| | |
|--|--|
| Material | black steel with Magnelis® coating or galvanized steel |
| Number of module rows | 1 |
| Layout | vertical |
| Incline | +/- 60° |
| Maximum tilt of the tracker in the north-south direction | 4° |
| Fixing method | driven in / concrete |
| Guarantee | up to 25 years guarantee for perforation |
| Adapted to bifacial modules | yes |
| Minimum module-to-ground clearance | 400 mm |

OPTIONS:

- TR/V1/R (vertical arrangement of modules in 1 row, radio control),
- TR/V2/R (vertical arrangement of modules in 2 rows, radio control),
- TR/V1/K (vertical arrangement of modules in 1 row, wired control),
- TR/V2/K (vertical arrangement of modules in 2 rows, wired control).

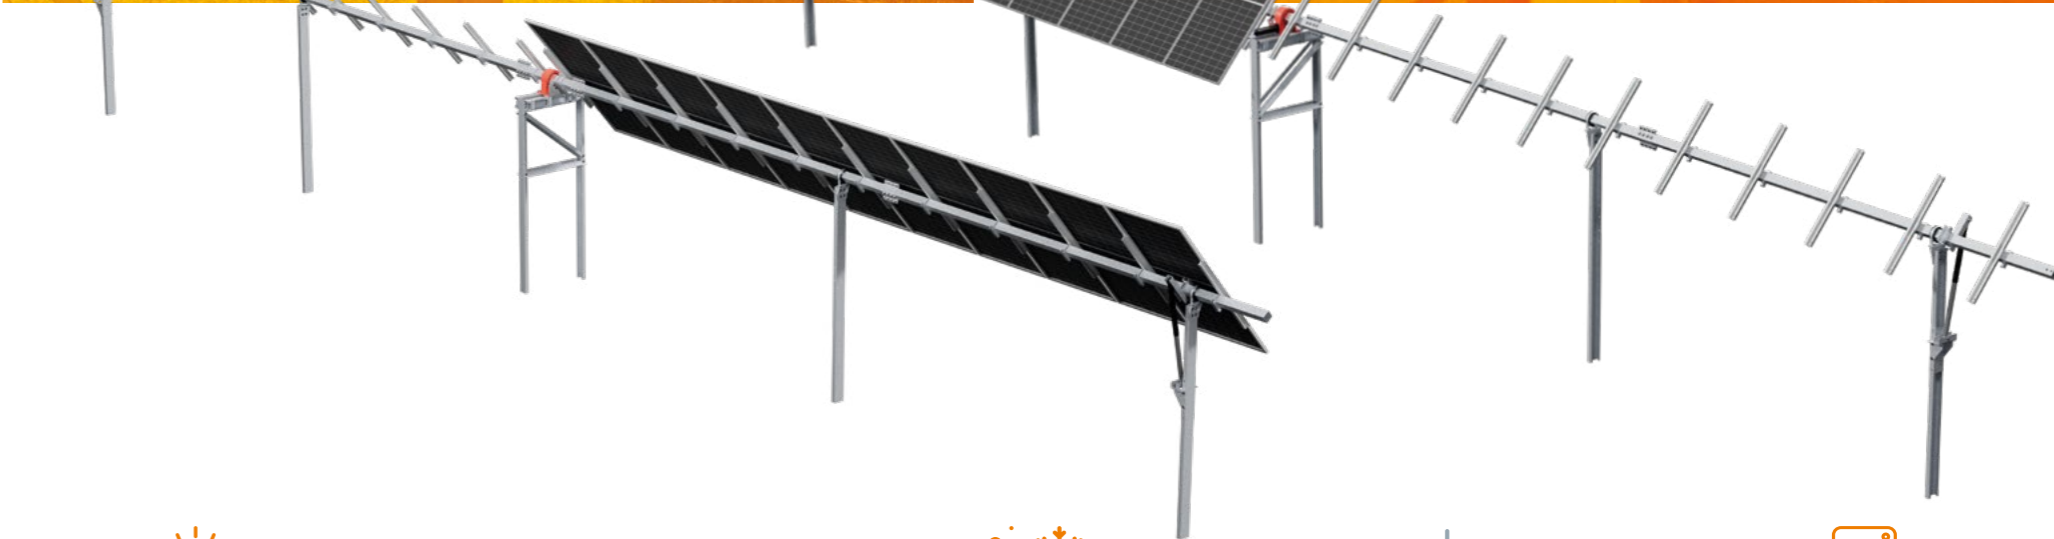

SUN TRACKING
system



3D BACKTRACKING
minimize row shading



SNOW REMOVAL
and module cleaning



EMERGENCY POWER
system



additional feature:
24/7 MONITORING
APPLICATION





Freestanding SYSTEMS

TABLES DRIVEN IN OR FIXED
MECHANICALLY

BIFACIAL - WITH TWO SUPPORTS

▶ The **bifacial system** is characterised by a reduced shadowing of modules by structural elements. The structure profiles are spaced in such way that they enable a maximum exposure of the bottom side of the bifacial modules to reflected and scattered light.

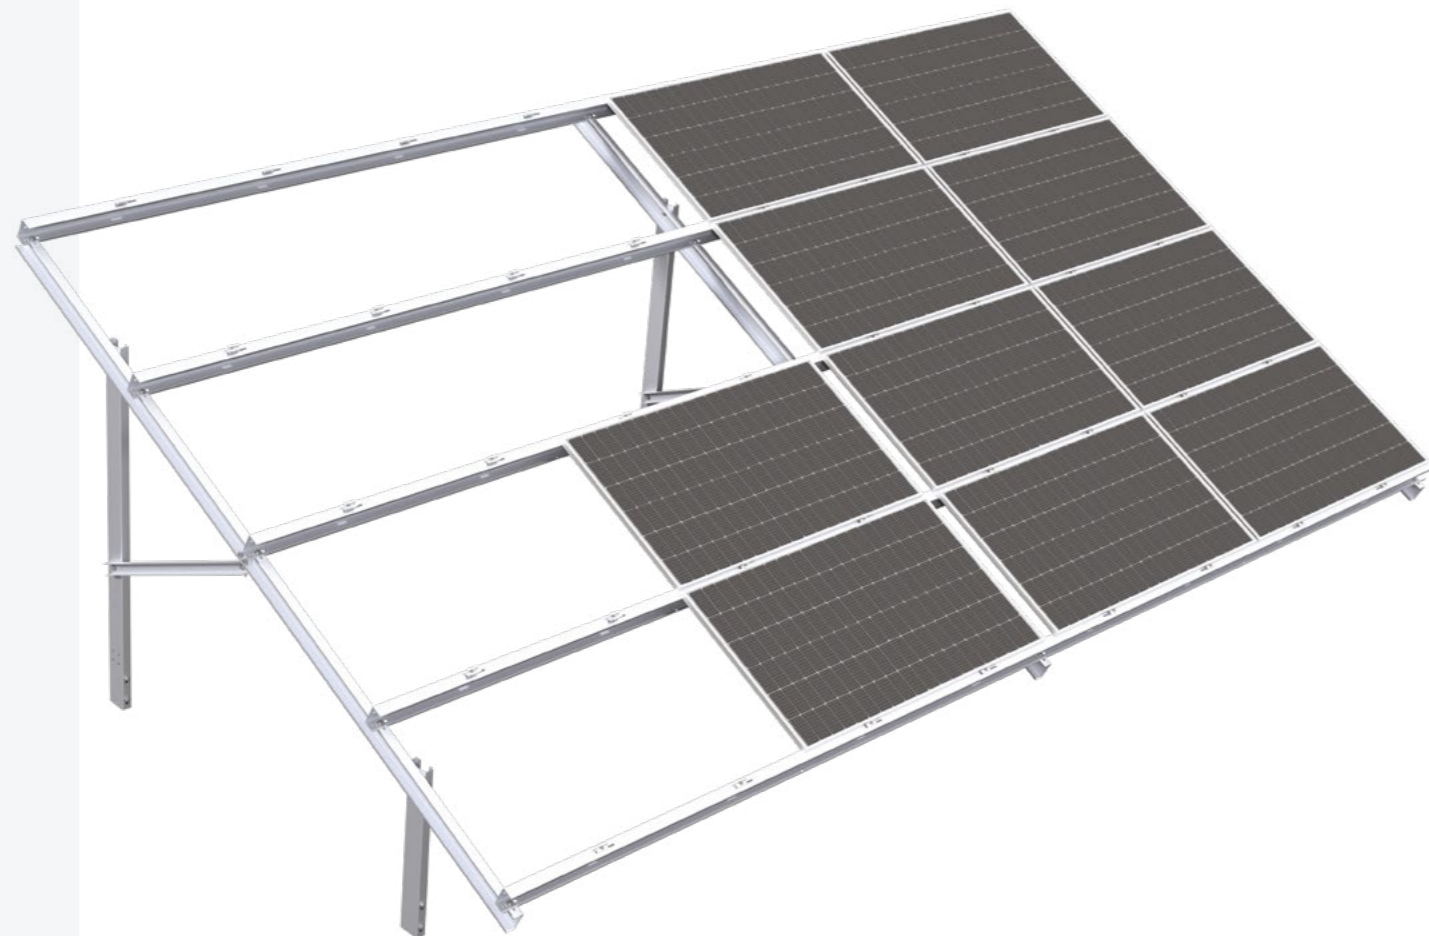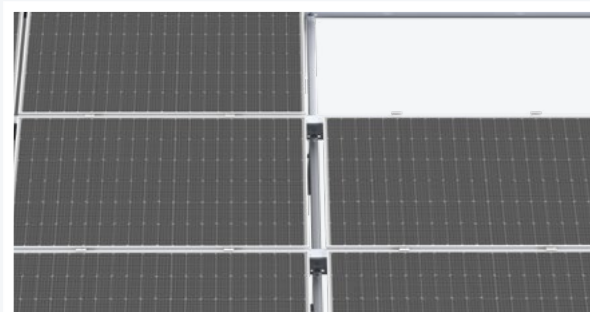


Freestanding SYSTEMS



BIFACIAL - WITH TWO SUPPORTS

▶ Vertical arrangement of two modules.

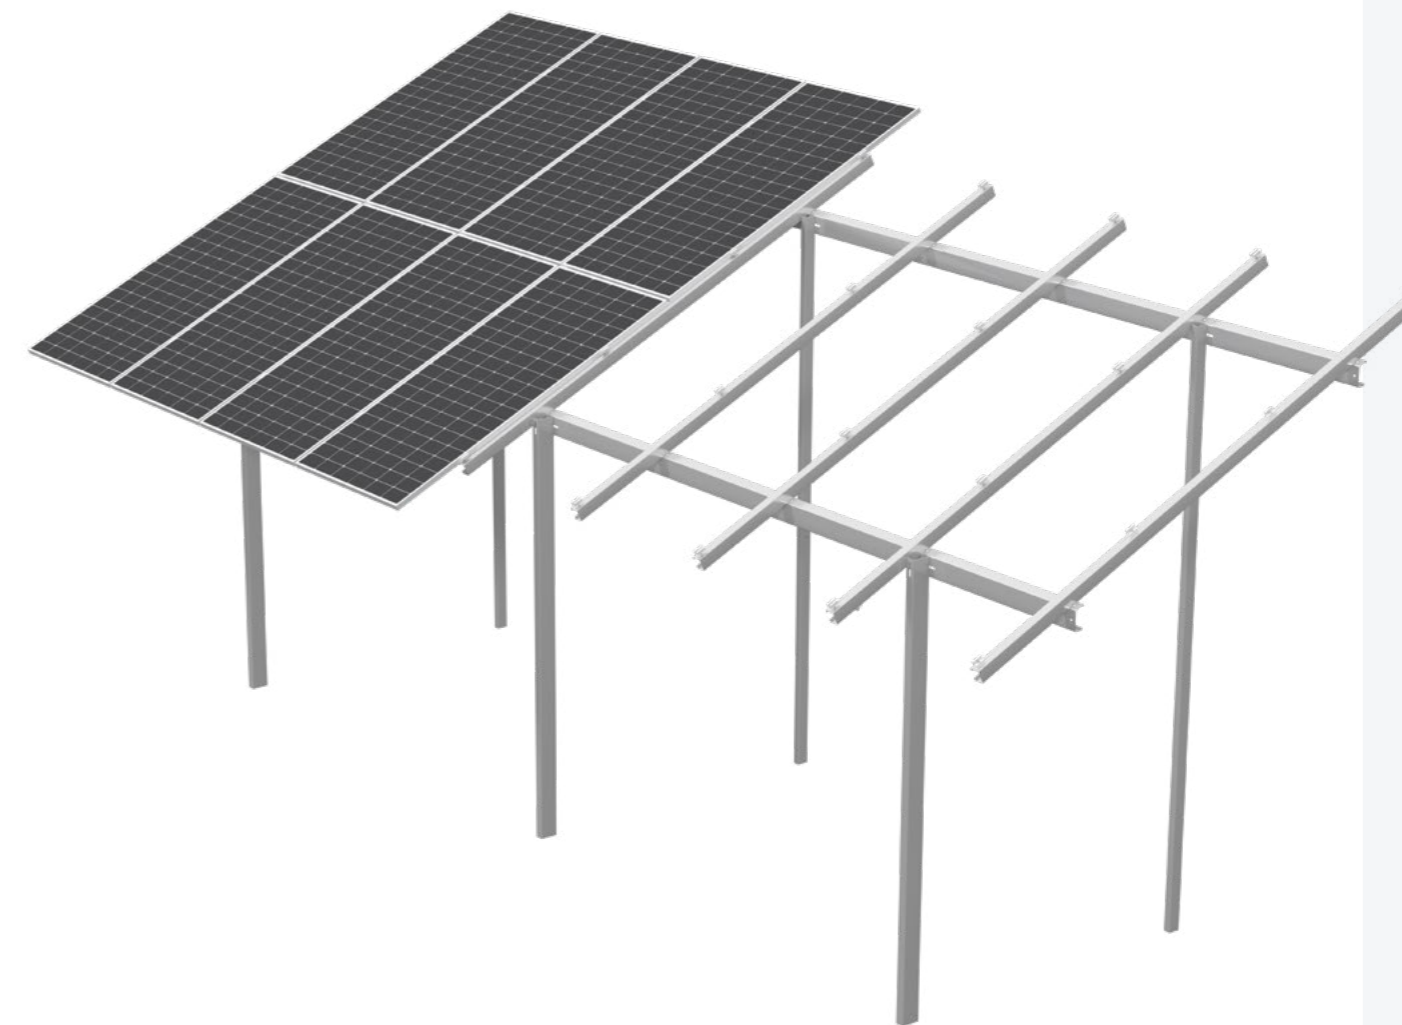



Freestanding SYSTEMS

DRIVEN IN – WITH TWO SUPPORTS

▶ Horizontal arrangement of four modules.




Freestanding SYSTEMS



DRIVEN IN - WITH TWO SUPPORTS

▶ Vertical arrangement od two modules.


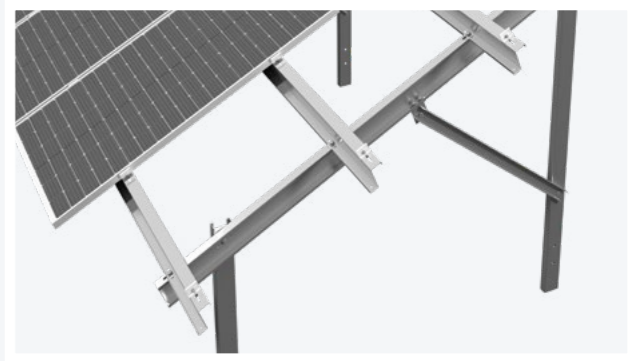




Freestanding SYSTEMS

DRIVEN IN - WITH THREE SUPPORTS **EAST / WEST**

- ▶ Horizontal arrangement of four modules.

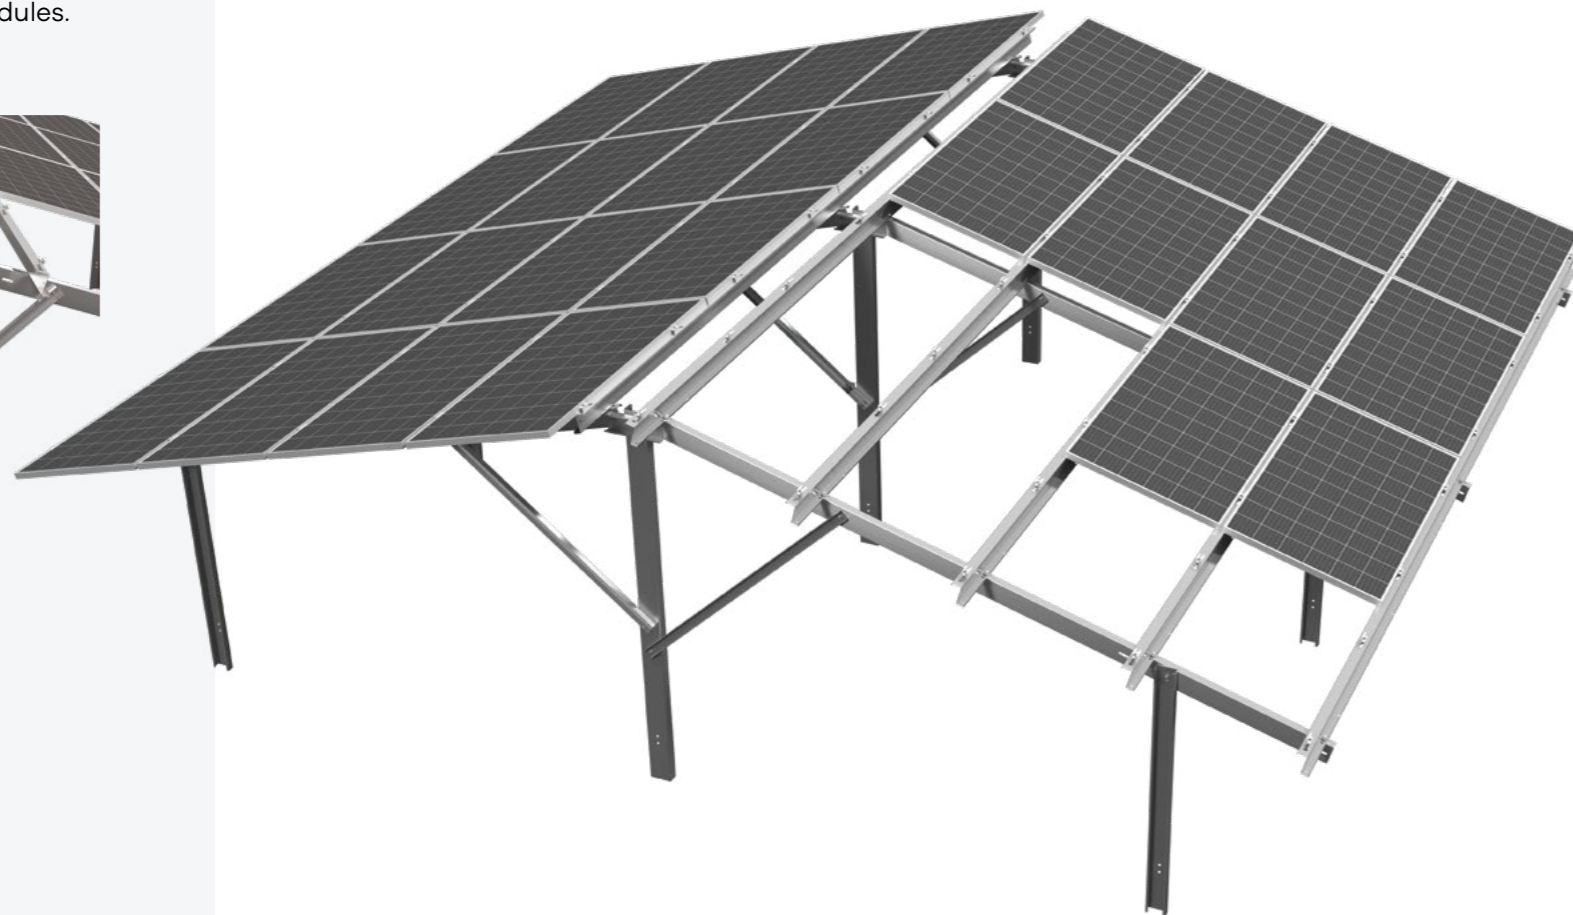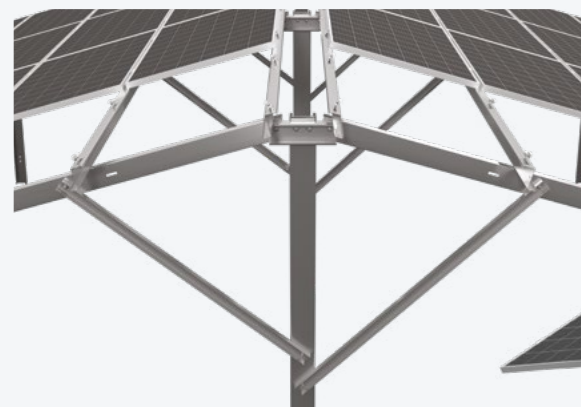

Freestanding SYSTEMS



MECHANICALLY FIXED - WITH TWO SUPPORTS

- ▶ Horizontal arrangement of four modules.
- ▶ Option for a different configuration of the modules.





Roof SYSTEMS



FOR FLAT ROOF



FOR PITCHED ROOF

► What are the roof systems?

Roof systems are solutions in which a **roof is used as a surface for fixing of photovoltaic modules**. The installation method is selected according to the **roof structure** and **decking**.

When selecting the roof fixing system, the following aspects are particularly important:

- roof load bearing capacity, i.e., its acceptable load,
- roof tightness, being a precondition for the use of an invasive system.

► Extensive range

The systems offered for flat roofs (the incline of up to 5°) include Ekierki Eco, with a ballast or fixed mechanically, as well as ballast aerodynamic systems Aero S and Aero EW.

We also offer systems for pitched roofs (the incline exceeding 5°), selected individually for each type of roof decking. With a small number of elements, the roof systems are quick and easy to assembly.

► Resistance to corrosion

Roof structures are made of **high quality aluminium profiles**, with all connecting elements manufactured of **stainless steel**. This type of connection is the best solution for structures exposed to adverse weather conditions, ensuring an **excellent resistance to corrosion**.



a 10-year guarantee
for the systems



vertical or horizontal
layout of the modules



structures adapted to
glass-glass modules





Systems FOR FLAT ROOFS

AERO S - INCREASED HEIGHT

SOUTH

AERO EW - INCREASED HEIGHT

EAST/WEST

► Aerodynamic systems on a support of the increased height allow to maintain 10-centimetre distance between the module frame and the roof surface. The systems include individually designed AERO profiles. Special connections in profile joints enable adjusting rotation to ensure precise adhering to the module surface. The systems of the increased height for a flat roof ensure better air circulation and protection of cables, thus guaranteeing that fire-prevention conditions of module manufactures are met.

Fixing method: glueing or heat sealing / weighing down with ballast



Possibility of mounting both on the short* and long side of the module

* Horizontal installation of large modules on their short side is only possible when a manufacturer of the modules allows it.

Systems FOR FLAT ROOFS



AERO S – GLUED*


SOUTH

AERO EW – GLUED*

EAST / WEST

► The Aero S / EW system glued to membrane is based on glueing of fixing components from the same material as the roof decking. This way, a stable structure can be formed without unnecessary loading of the roof. The installation does not interfere with the roof decking.

Fixing method: glueing or heat sealing

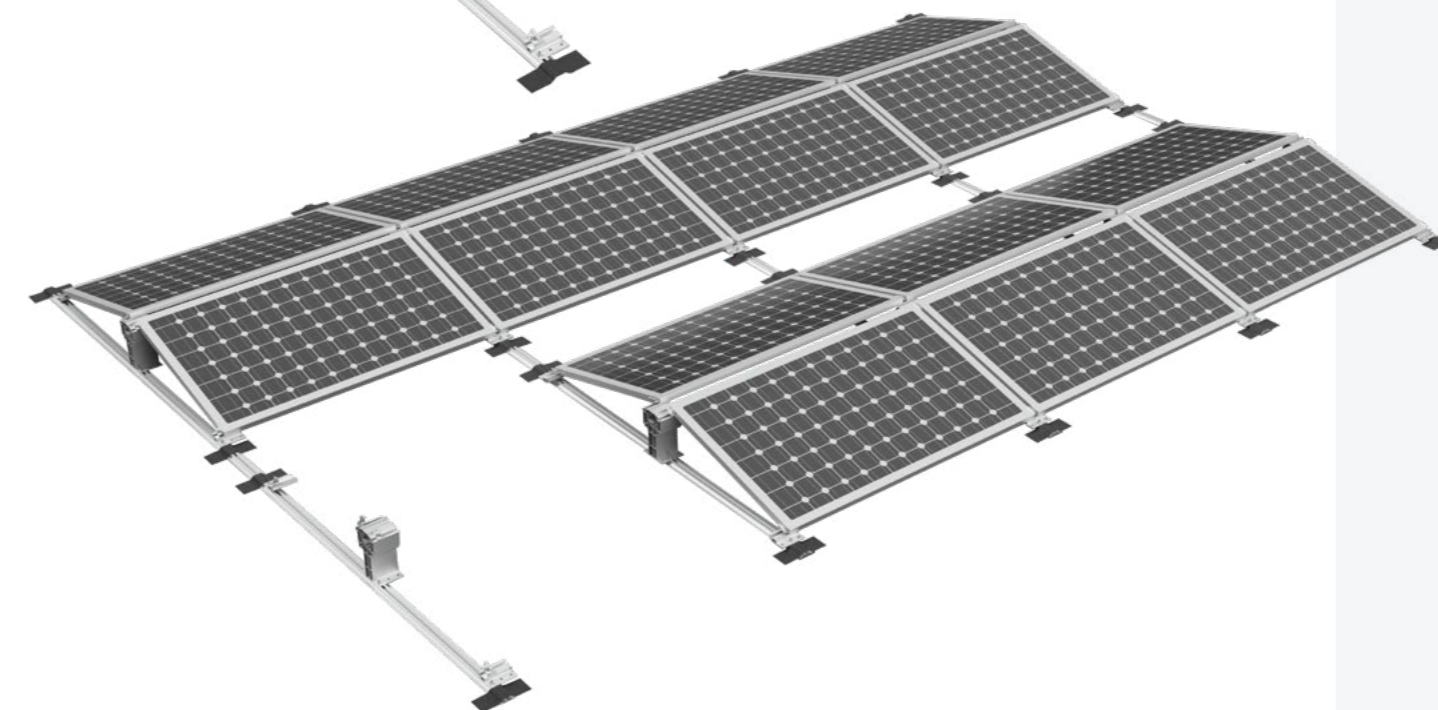

Possibility of mounting both on the short* and long side of the module


* Horizontal installation of large modules on their short side is only possible when a manufacturer of the modules allows it.



Systems FOR FLAT ROOFS

AERO S* SOUTH

- ▶ An advantage of the Aero S is a permanent connection of rows and the use of side and rear covers, which minimise the wind influence on the structure, help to reduce the amount of required ballast, and in consequence, decrease the roof load. The installation does not interfere with the roof decking.
- ▶ The tests performed in a wind tunnel confirm that the ballast can be **reduced or even completely removed**.

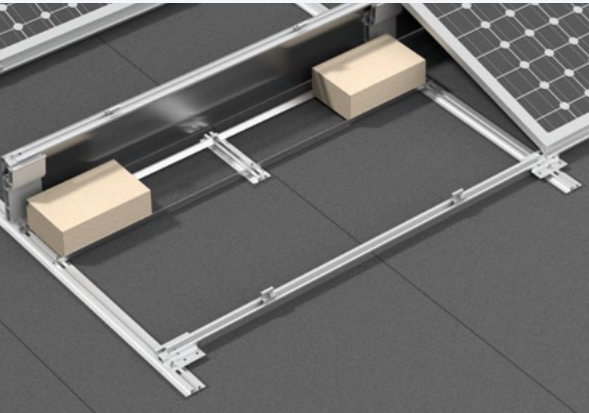



INSTALLATION ALONG A LONG SIDE

* Horizontal installation of large modules on their short side is only possible when a manufacturer of the modules allows it.



Systems FOR FLAT ROOFS

AERO EW* EAST / WEST

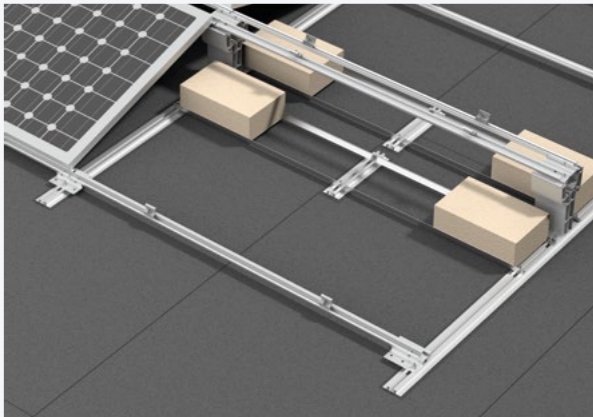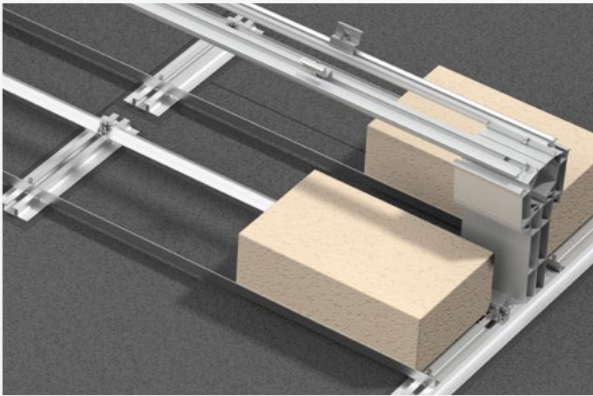

INSTALLATION ALONG A LONG SIDE


* Horizontal installation of large modules on their short side is only possible when a manufacturer of the modules allows it.



Systems FOR FLAT ROOFS


EKIERKA ECO WITH THE BALLAST*

- ▶ An advantage of the Ekierka Eco solution is a possibility to install modules horizontally, and to set the structure at different inclines. The installation does not interfere with the roof decking.

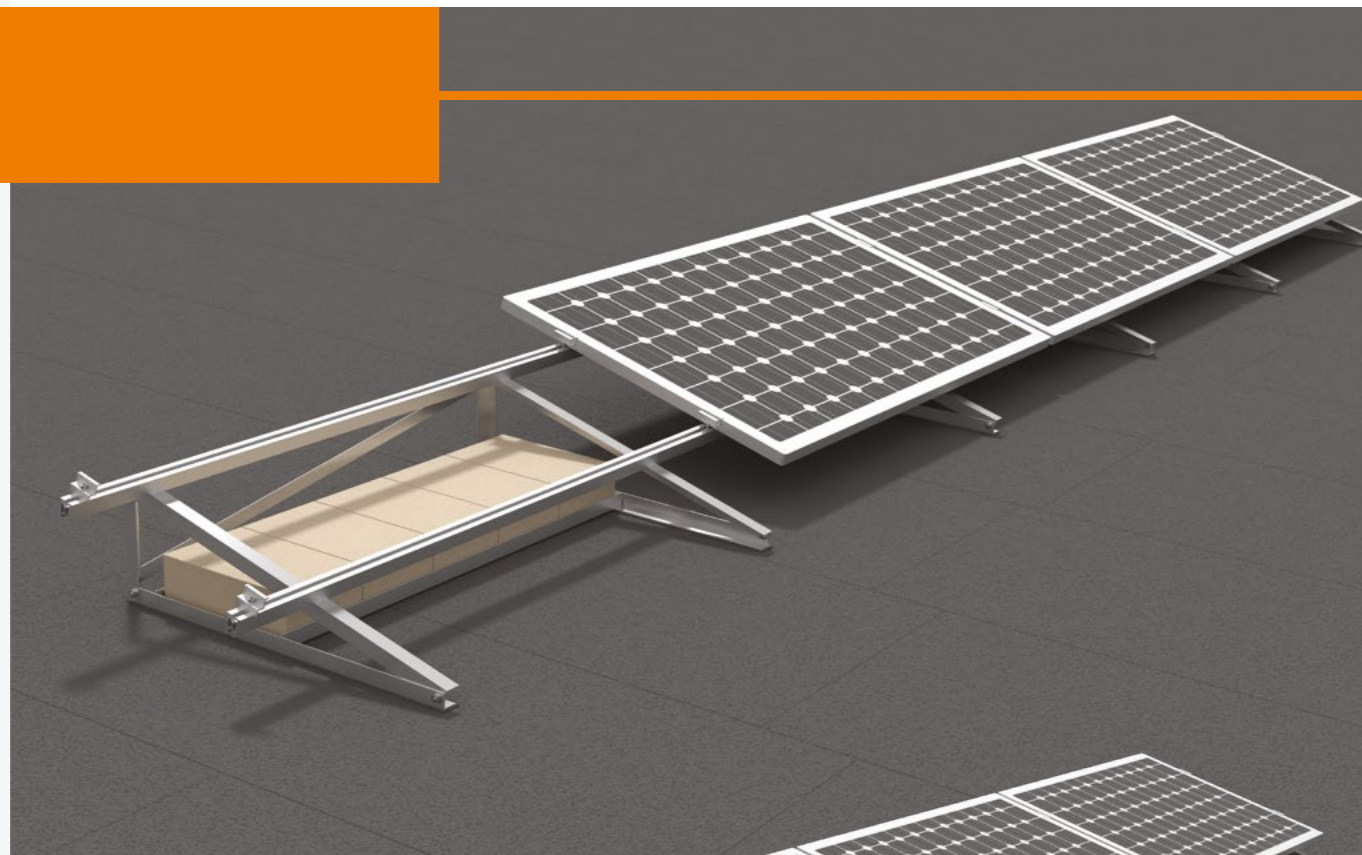

EKIERKA ECO - MECHANICAL INSTALLATION*

- ▶ An option of vertical or horizontal installation.


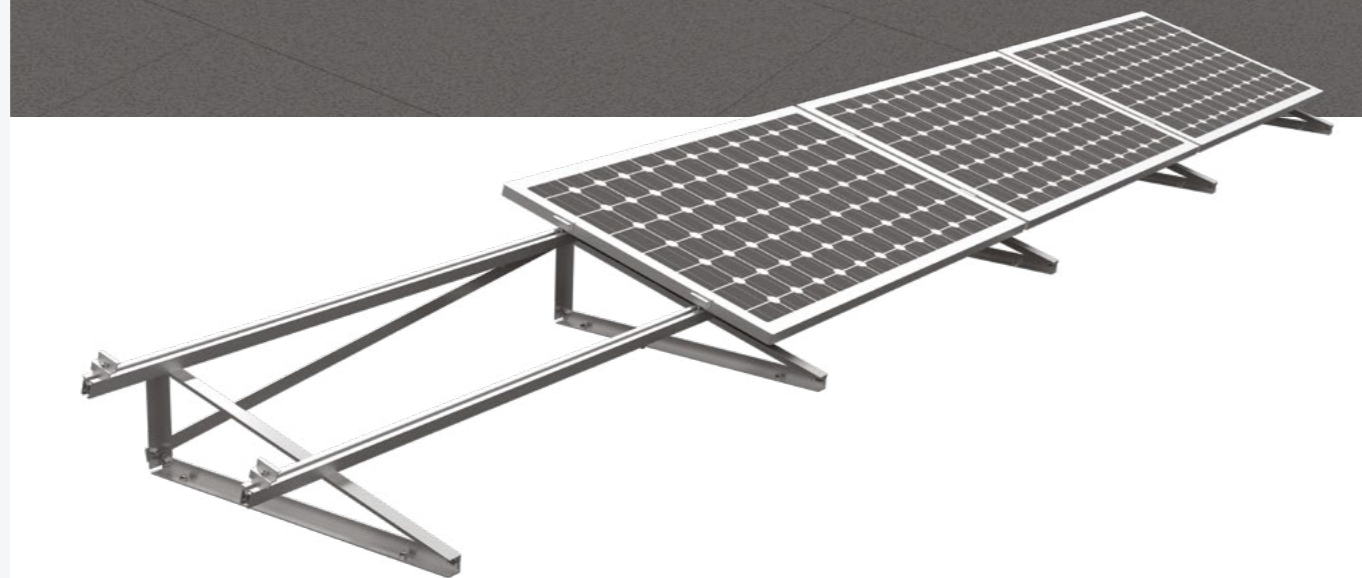


* Horizontal installation of large modules on their short side is only possible when a manufacturer of the modules allows it.

Systems FOR PITCHED ROOF





COVERED WITH METAL ROOFING TILES

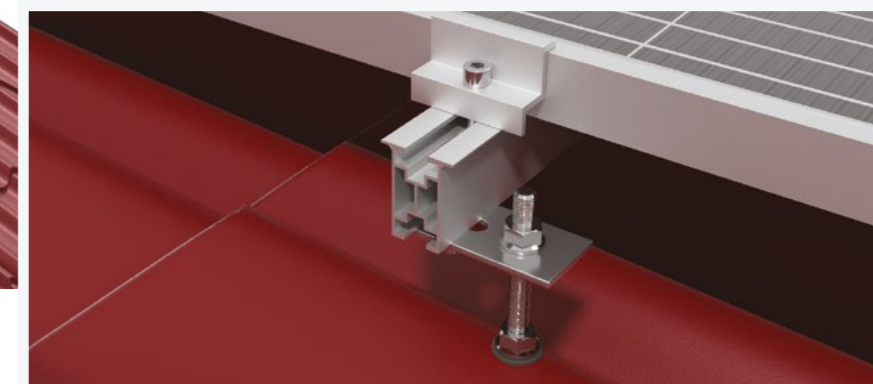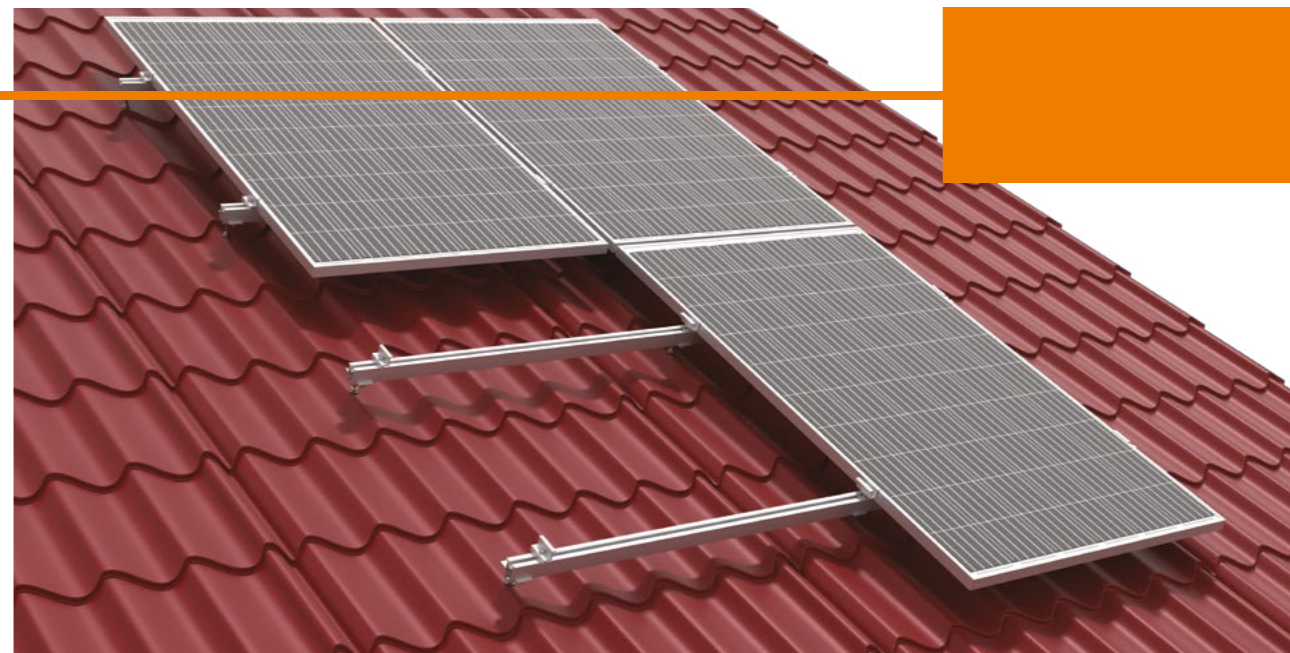

COVERED WITH METAL ROOFING - CROSS SYSTEM




- ▶ Horizontal, cross installation with double threaded bolts.

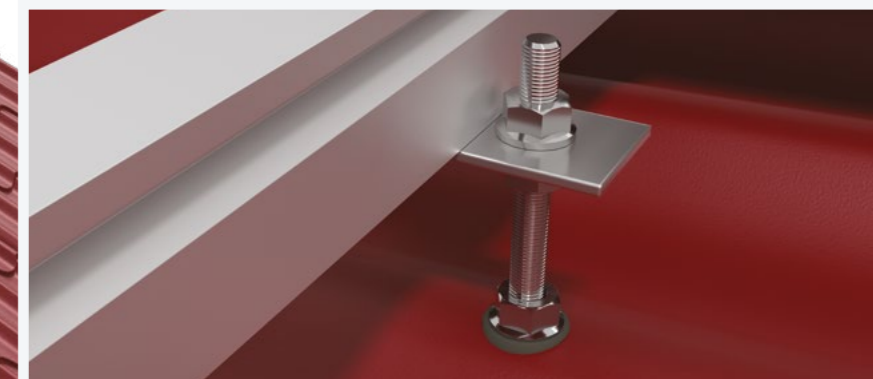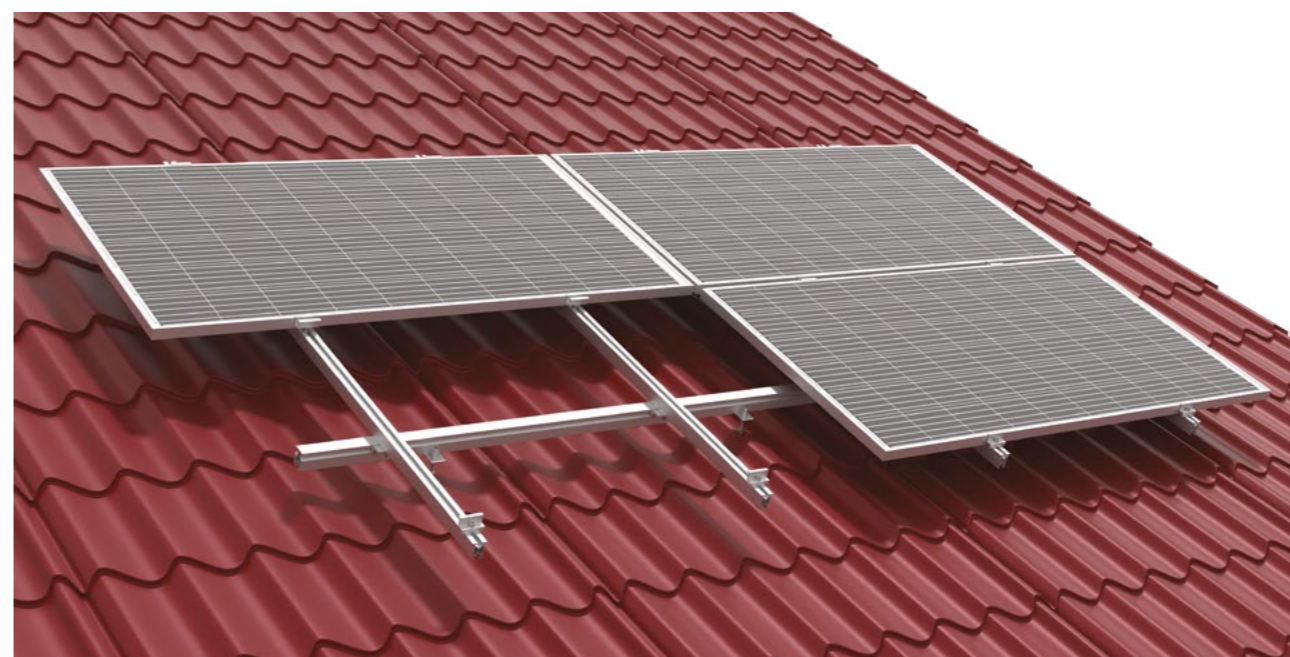

Systems
FOR PITCHED ROOF

**COVERED WITH TRAPEZOID
METAL SHEETS**




▶ Installation with a trapezoid bridge.

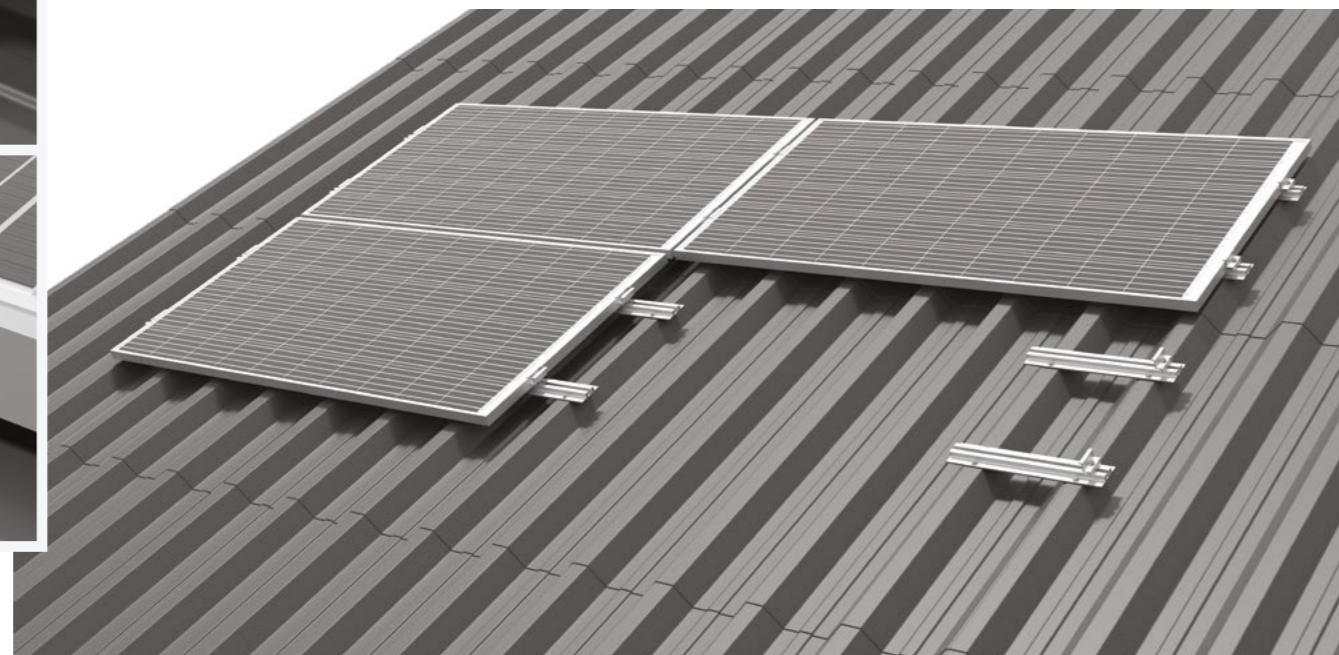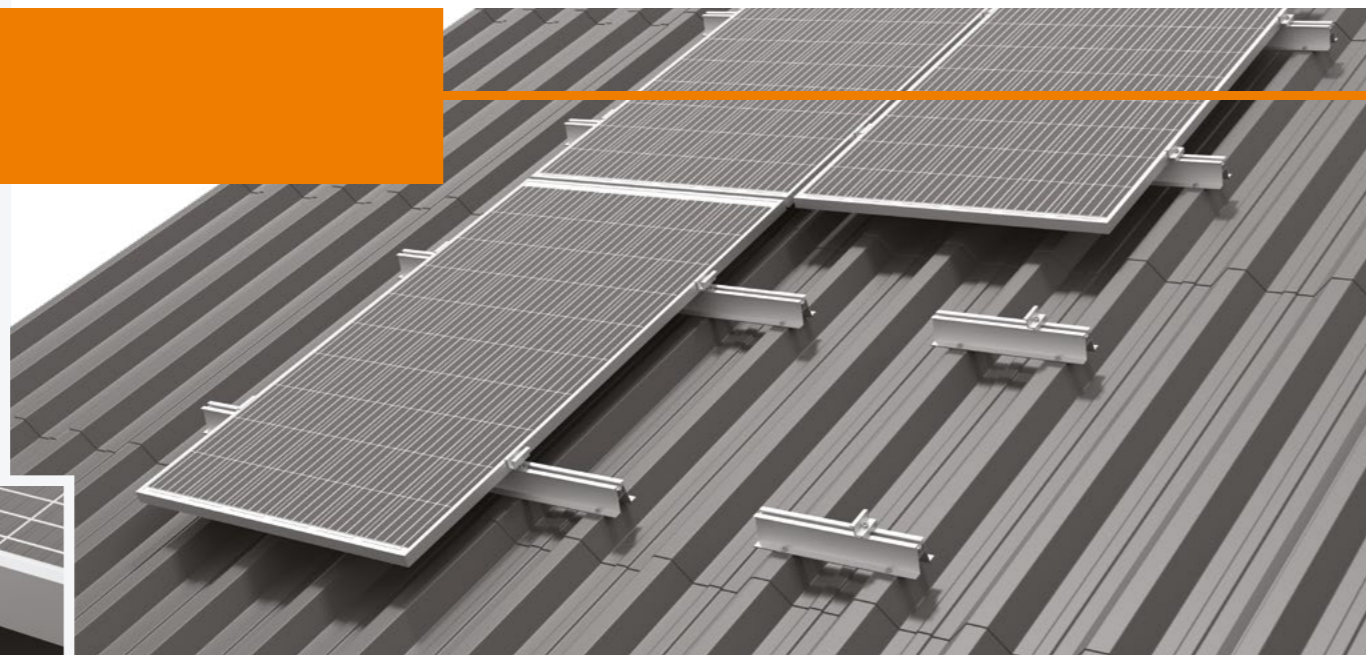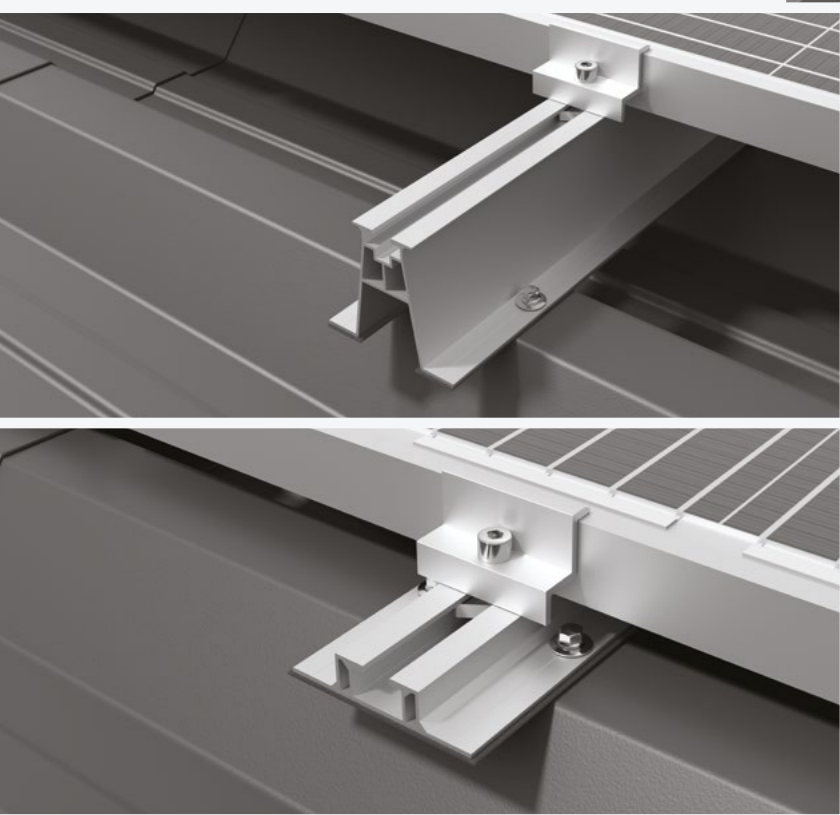

Systems
FOR PITCHED ROOF

**COVERED WITH TRAPEZOID
METAL SHEETS**

▶ Installation with a long trapezoid rail.

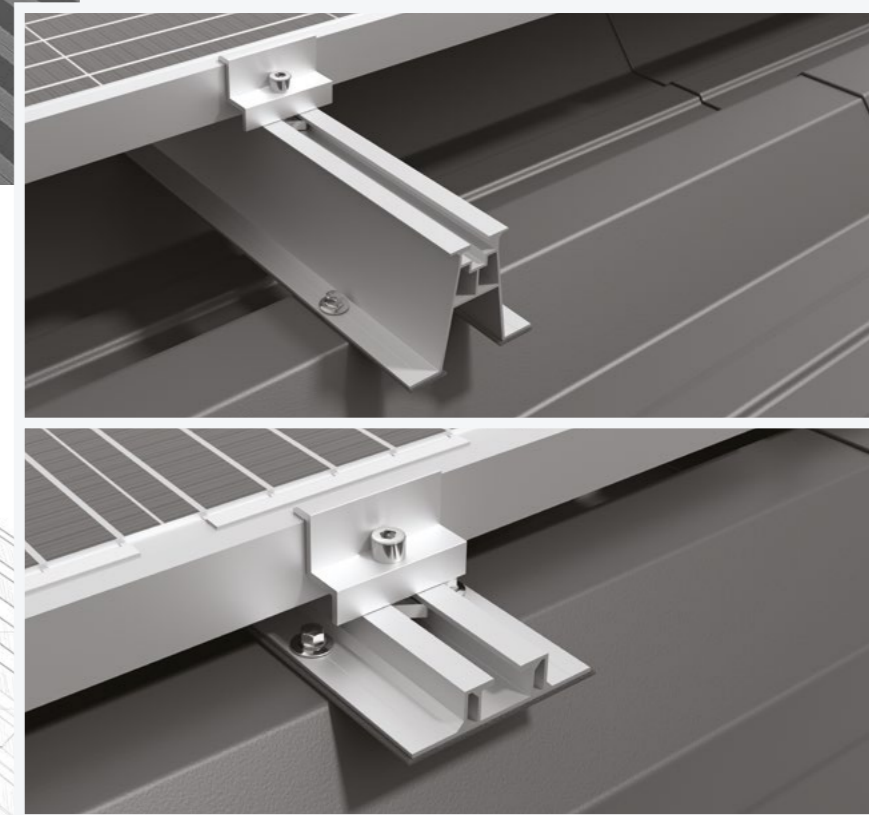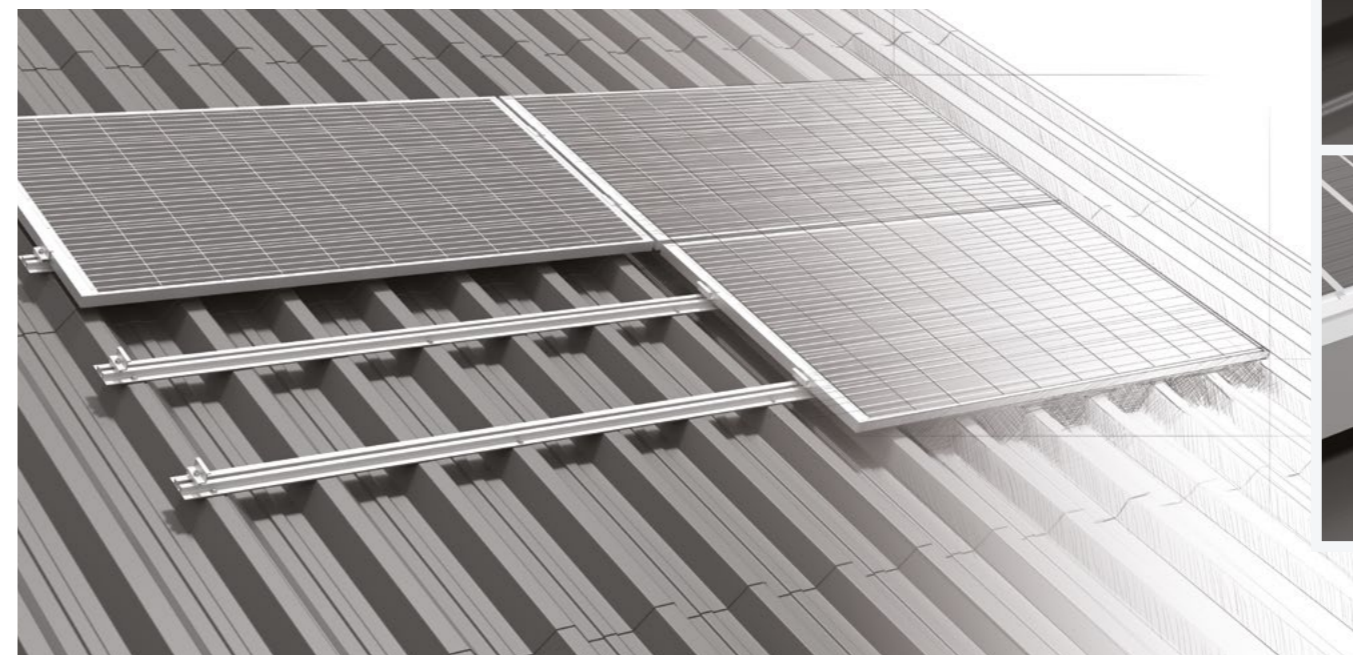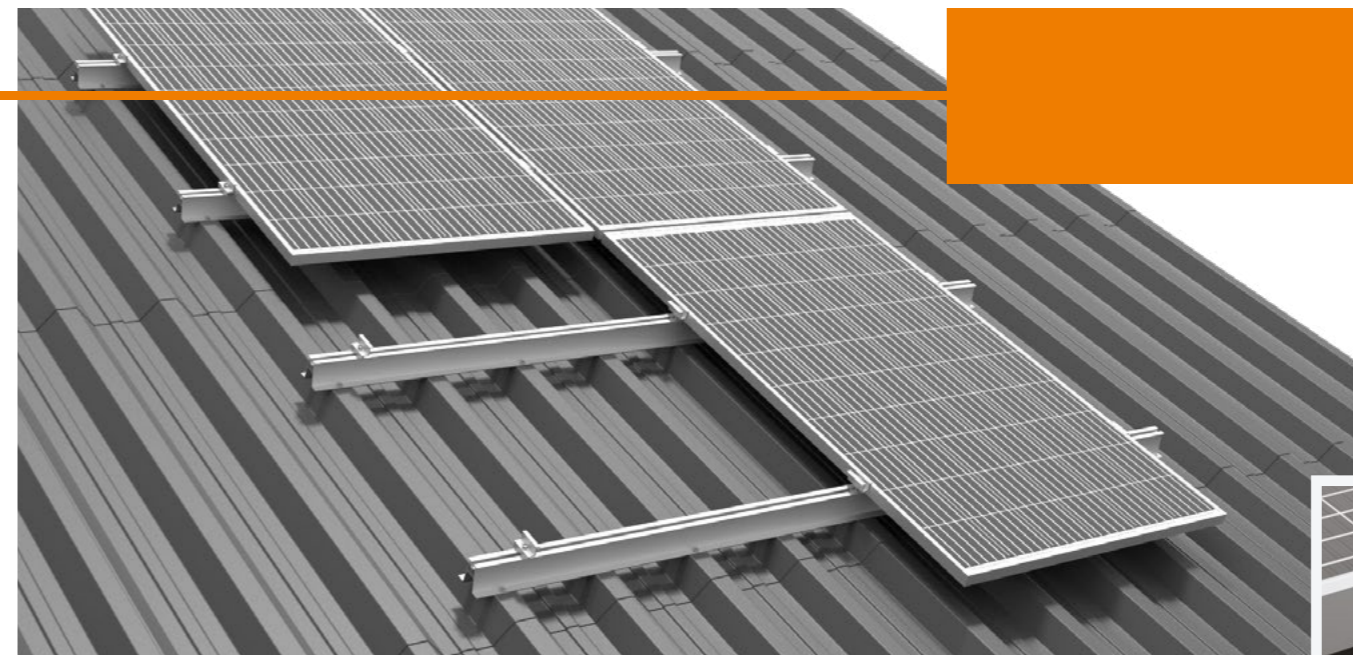







Systems FOR PITCHED ROOF

COVERED WITH SHEET METAL JOINED WITH A SEAM

▶ The installation does not interfere with the roof decking.

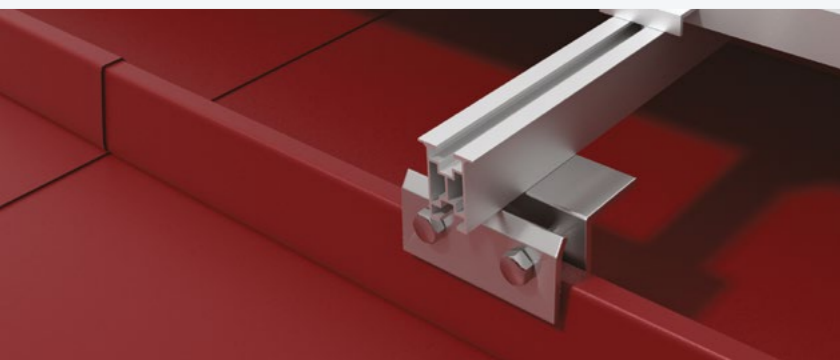


COVERED WITH ROOF SHINGLE / SLATE TILES

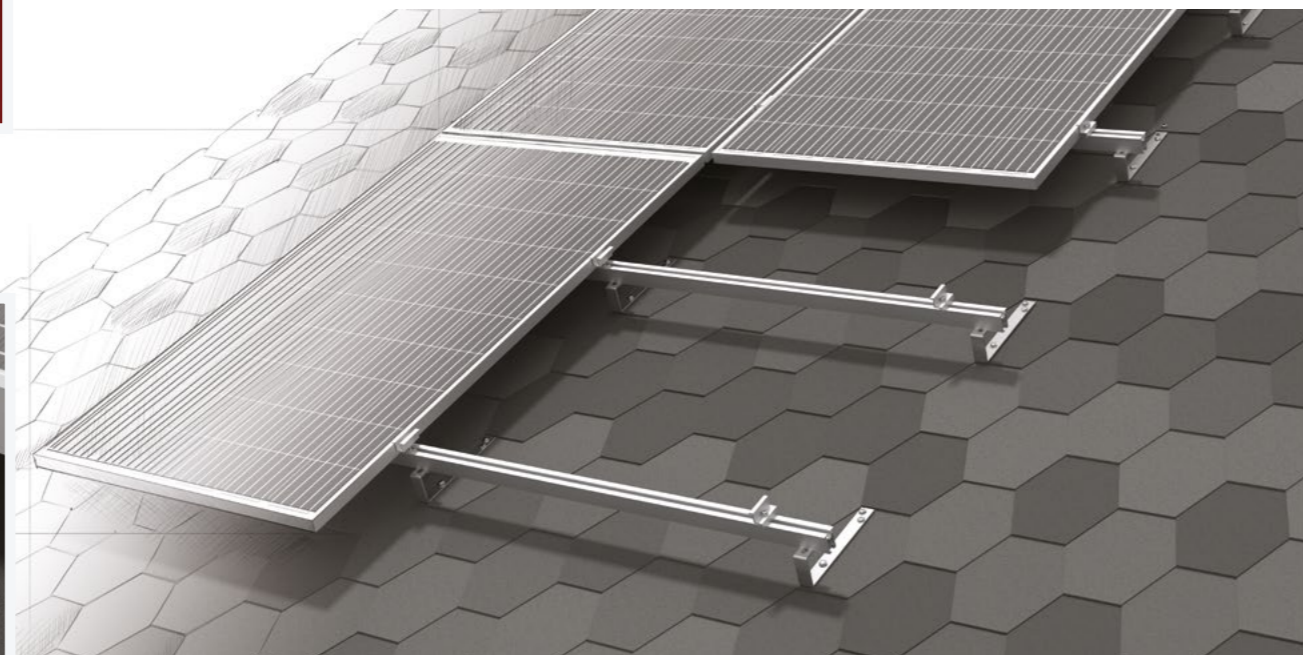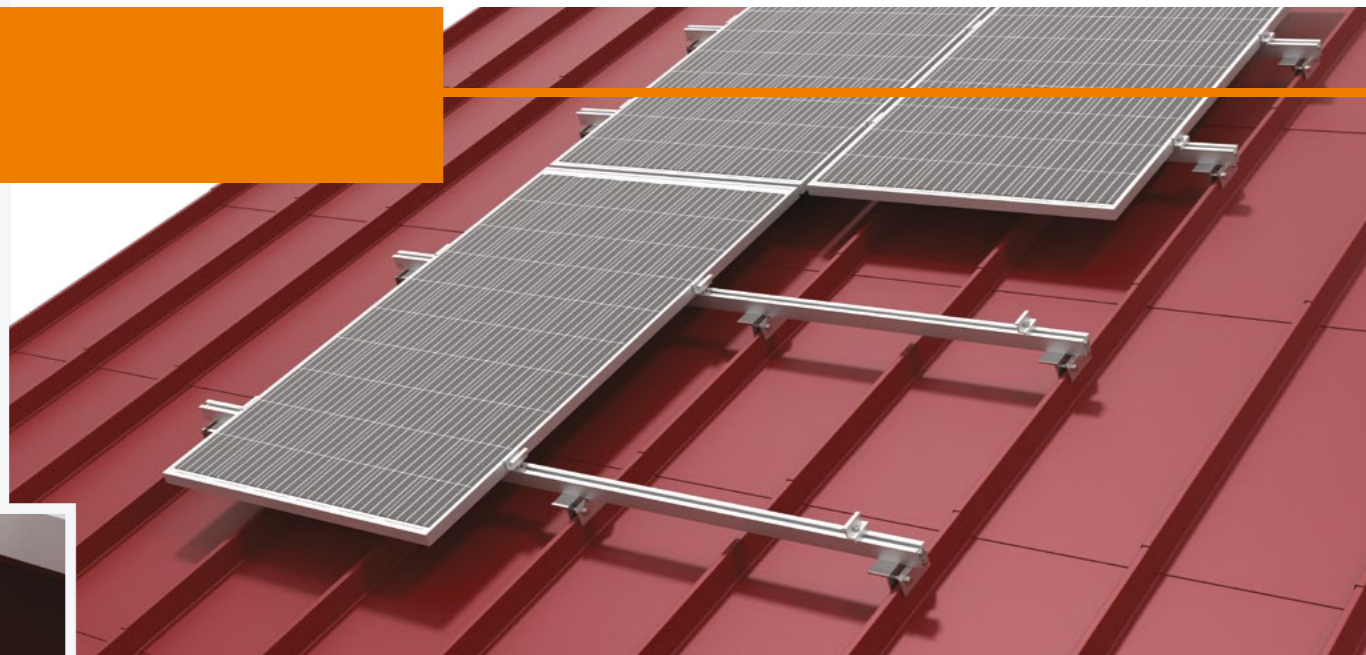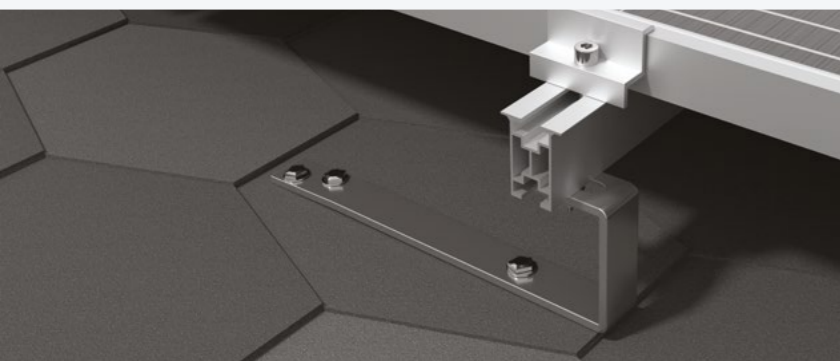



Systems FOR PITCHED ROOF



COVERED WITH CERAMIC TILES

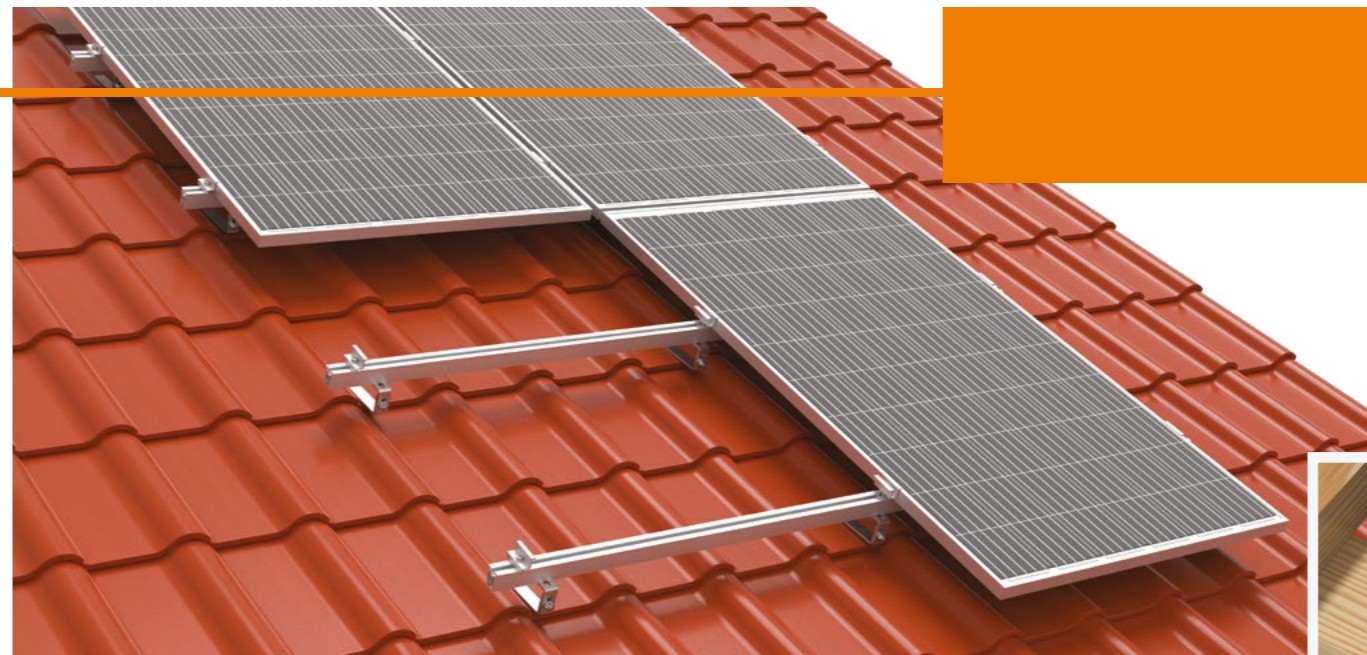


COVERED WITH FLAT TILES

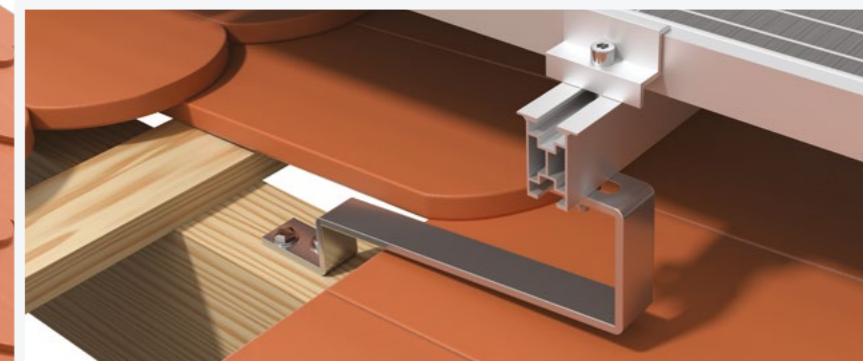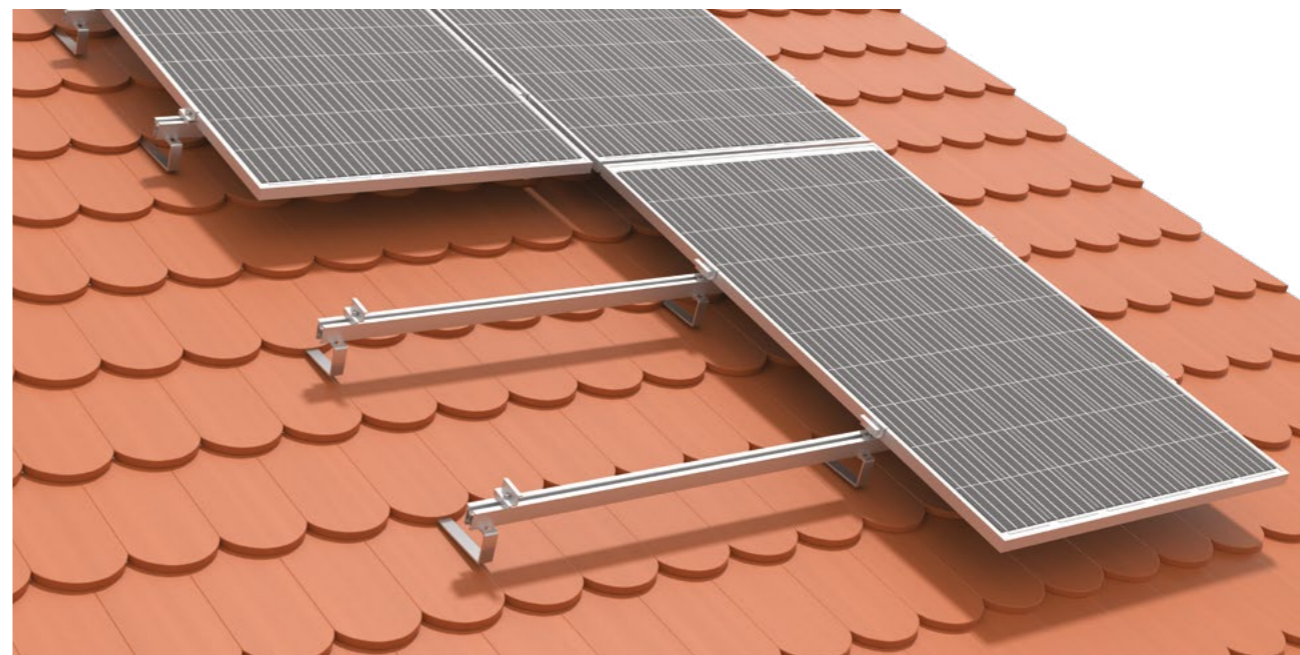



Systems for a roof COVERED WITH SANDWICH PANELS

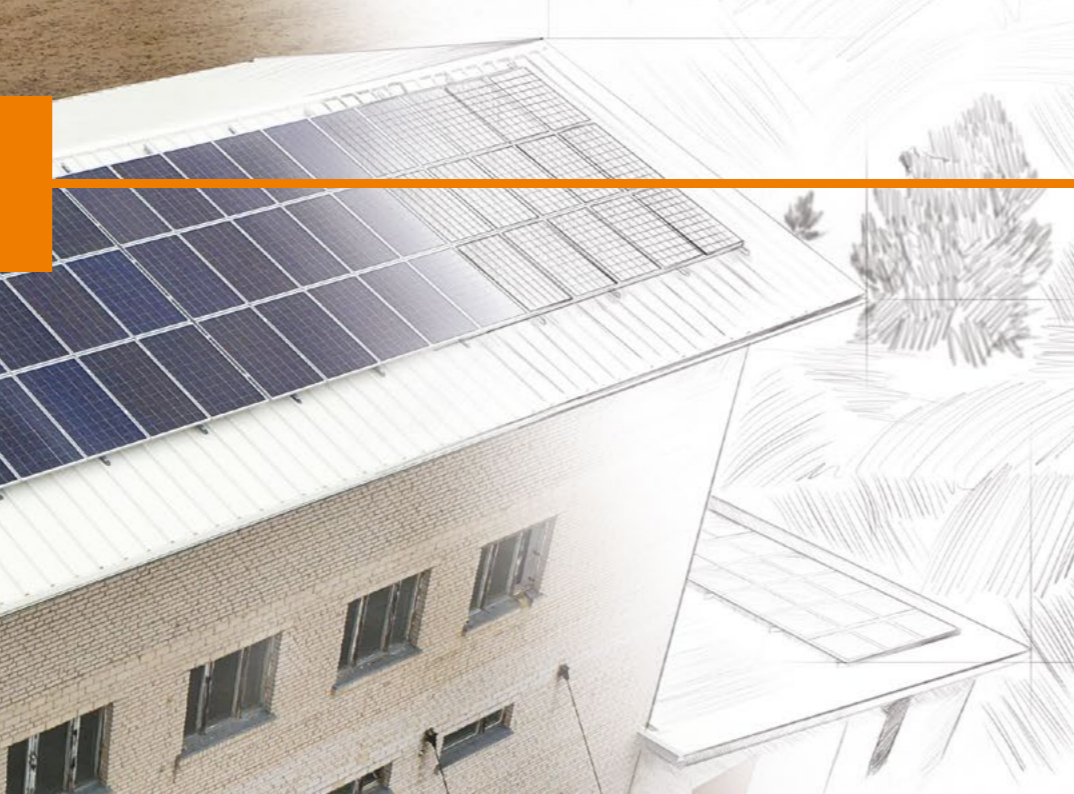

► Customised design

Systems for a roof covered with sandwich panels are fixed to the roof substructure, for example, using roofing screws. The steel profiles fixed to purlins are used - this solution prevents transfer of the load onto the sandwich panel and its permanent damage. Each design is analysed individually, so you can be sure that together we will find the best solution.



a 10-year guarantee
for the systems



vertical or horizontal
layout of the modules




structures adopted to
glass-glass modules



Systems for a roof COVERED WITH SANDWICH PANELS




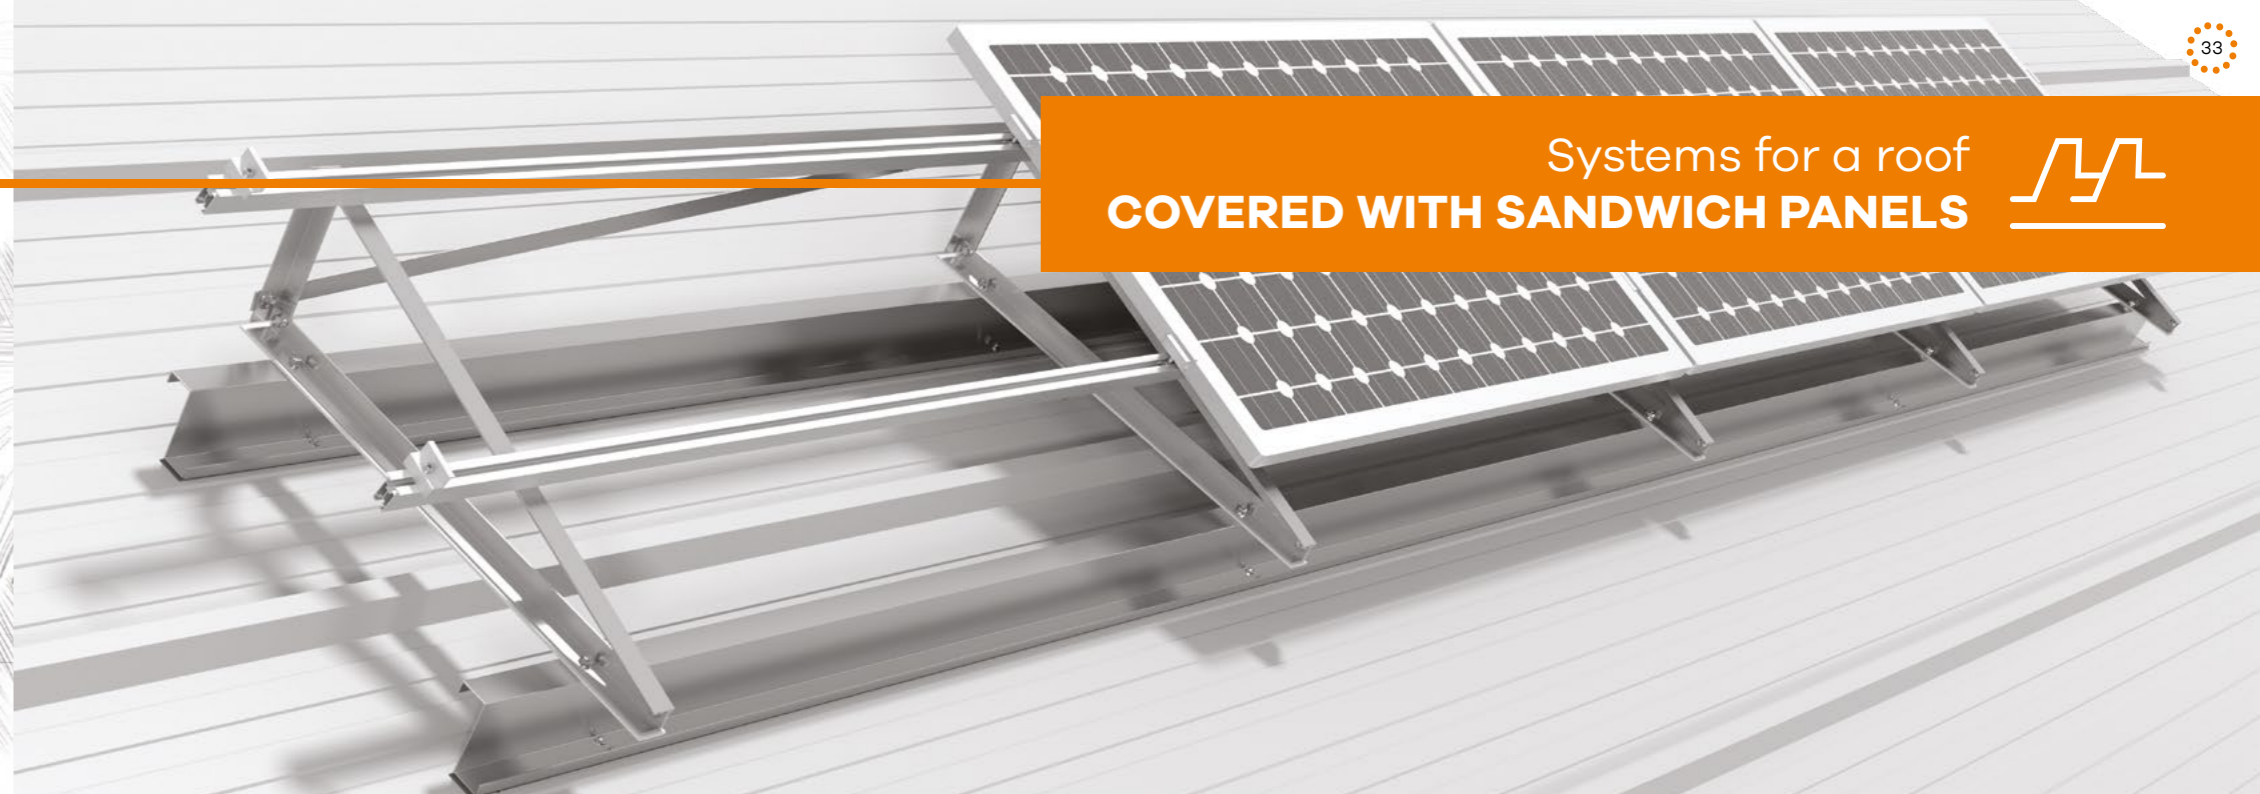

EKIERKA ECO - FLAT ROOF SYSTEM SOUTH


| TECHNICAL SPECIFICATION | |
|--|-------------------------------------|
| Material systemu | Aluminium and Magnelis® steel sheet |
| Roof type | Flat/sandwich panel |
| Module orientation | Horizontal |
| Fixing system | Triangles 25° |
| Roof surface area for 1 kW | 6.8 m² (for the 1650x992 module) |
| Roof load (a module of 20 kg 250 W was assumed) | 135.2 kg/1 kW 19.9 kg/m² |

Note: The calculations did not take into account the snow load and wind pressure/suction

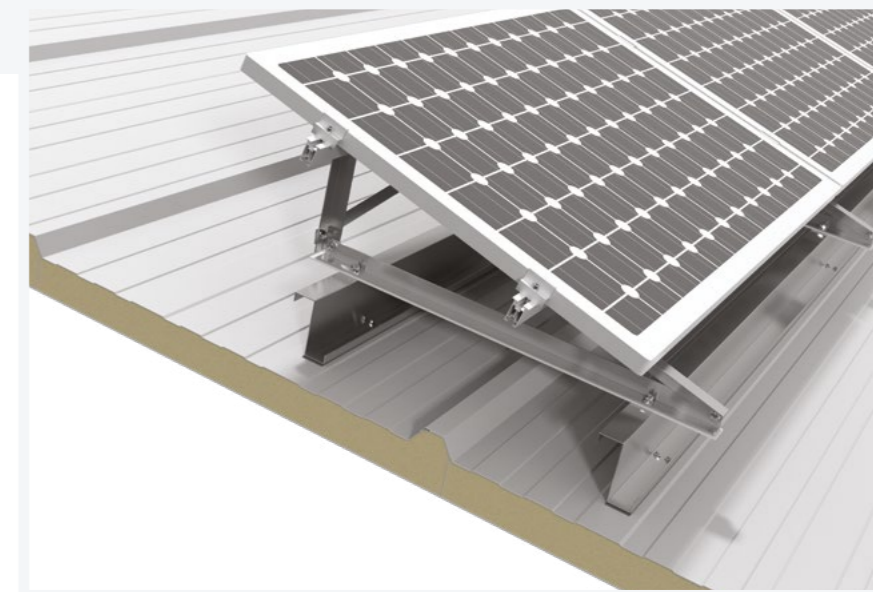




Systems for a roof
COVERED WITH SANDWICH PANELS

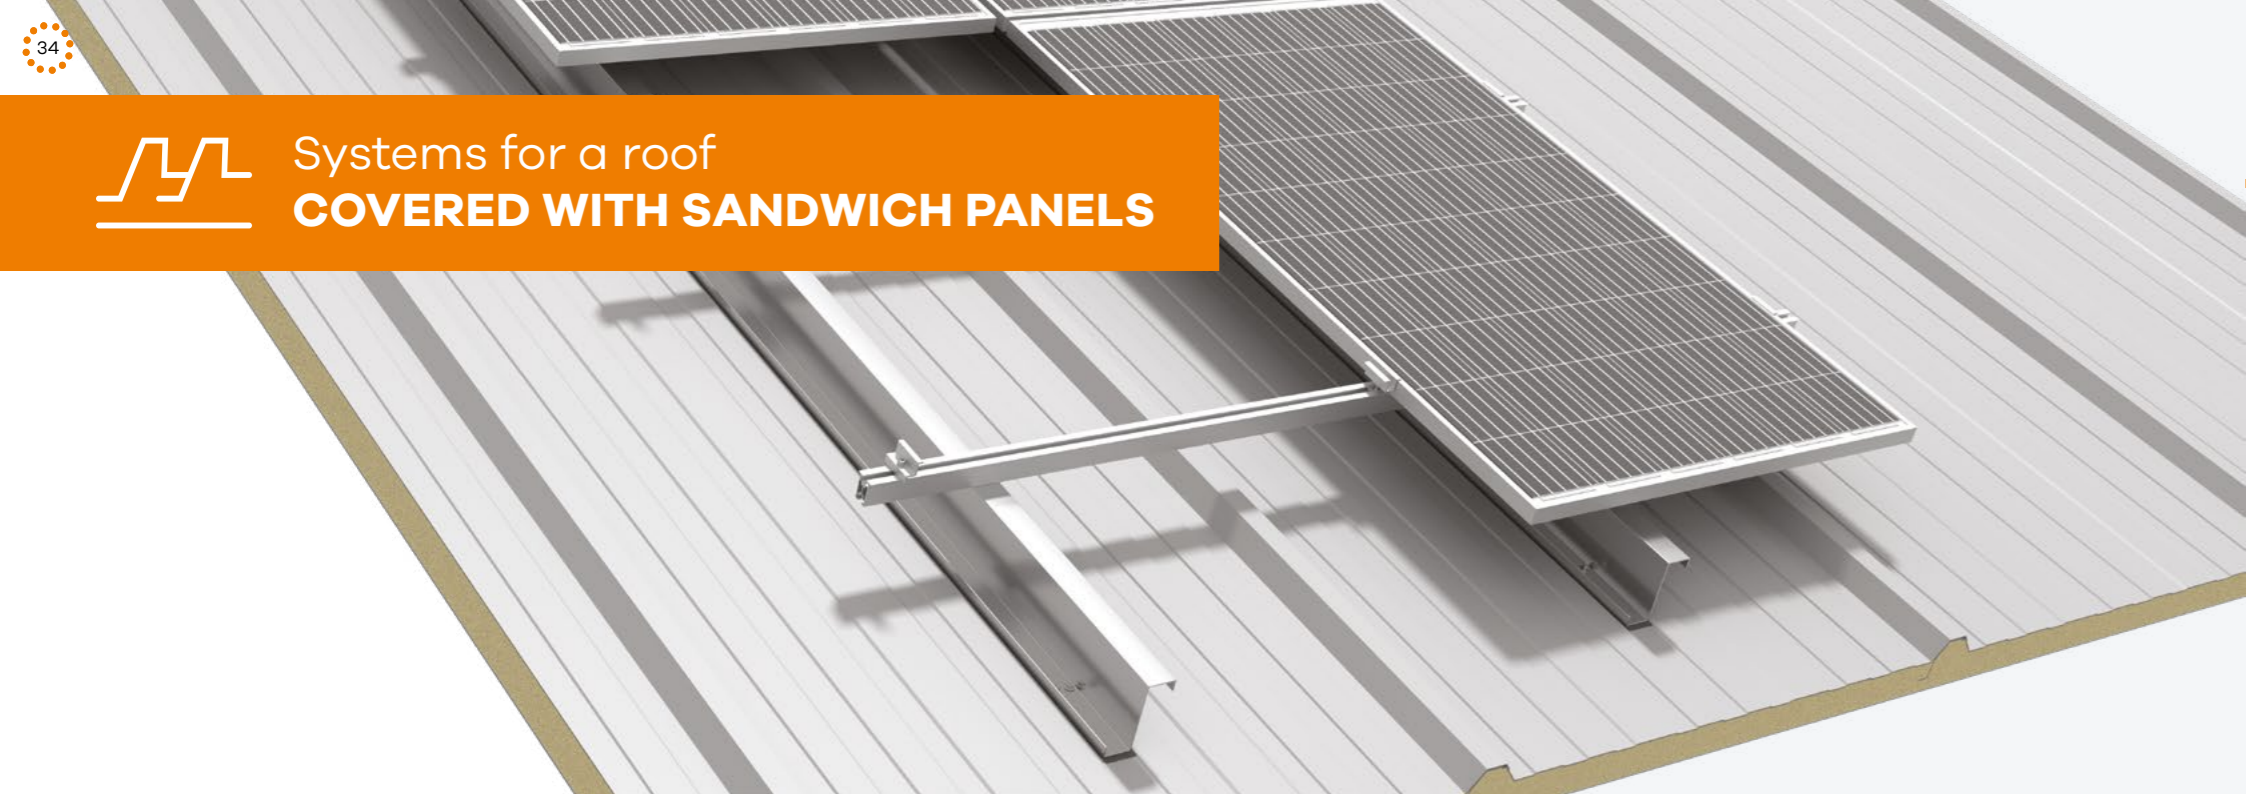

PITCHED ROOF SYSTEM

| TECHNICAL SPECIFICATION | |
|--|---|
| System material | Aluminium and Magnelis® steel sheet |
| Roof type | Pitched/sandwich panel |
| Module orientation | Vertical |
| Fixing system | Along the longer side, cross installation |
| Roof surface area for 1 kW | 6.65 m² (for the 1650x992 module) |
| Roof load (a module of 20 kg 250 W was assumed) | 103.7 kg/1 kW 15.6 kg/m² |

Note: The calculations did not take into account the snow load and wind pressure/suction

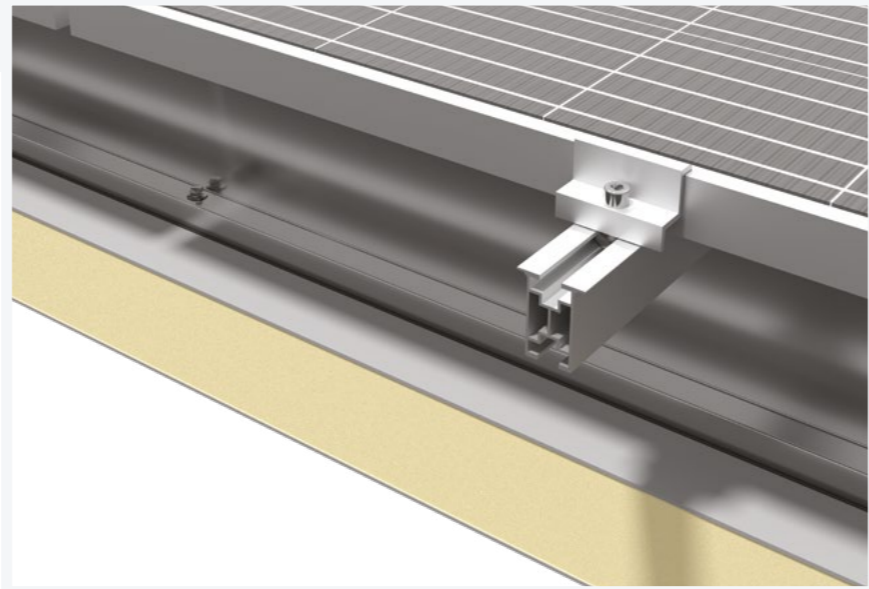

AUTOBOX
SYSTEM



What the AUTOBOX systems are?

The **AUTOBOX systems** are ground structures intended to be used at parking spaces. This solution combines a functionality of a shed with a photovoltaic system which can be adapted to be used as a charging station for electric cars powered by energy obtained from a photovoltaic system.

Properties and structures

AUTOBOX systems are available as a **single** (two parking spaces) or a **multi-segmented** option, with a roof incline up to 10°. The load bearing structure, supported at two points, can be covered with trapezoidal sheet metal or be formed solely of purlins of cold-bended profiles. The shed structure is made of **hot-dip galvanised steel**, and the components of the support structure, to which modules and connectors are fixed, are **aluminium**.



a **10-year guarantee**
for the systems



a structure can be covered with
trapezoidal sheet metal



vertical or horizontal layout
of the modules



a single- or a multi-segmented
shed



Façade SYSTEMS



► What the BIPV façade systems are?


The **Building Integrated Photovoltaics (BIPV)** façade systems are an ideal solution when there is no space for a ground system, and the roof structure makes installation of PV modules difficult or impossible.

► Modern technology

There is a gap (20 mm) between the insulating material and the external cladding (made of modules), ensuring **air circulation**, and this **improves thermal insulation** of a building, and allows to **remove moisture**.

► Effectiveness and aesthetics

The systems designed for fixing to a façade are not only **exceptionally effective**, but also **aesthetic - they emphasise the modern character of the building**. The façade systems can be used in office, hospital or educational buildings.

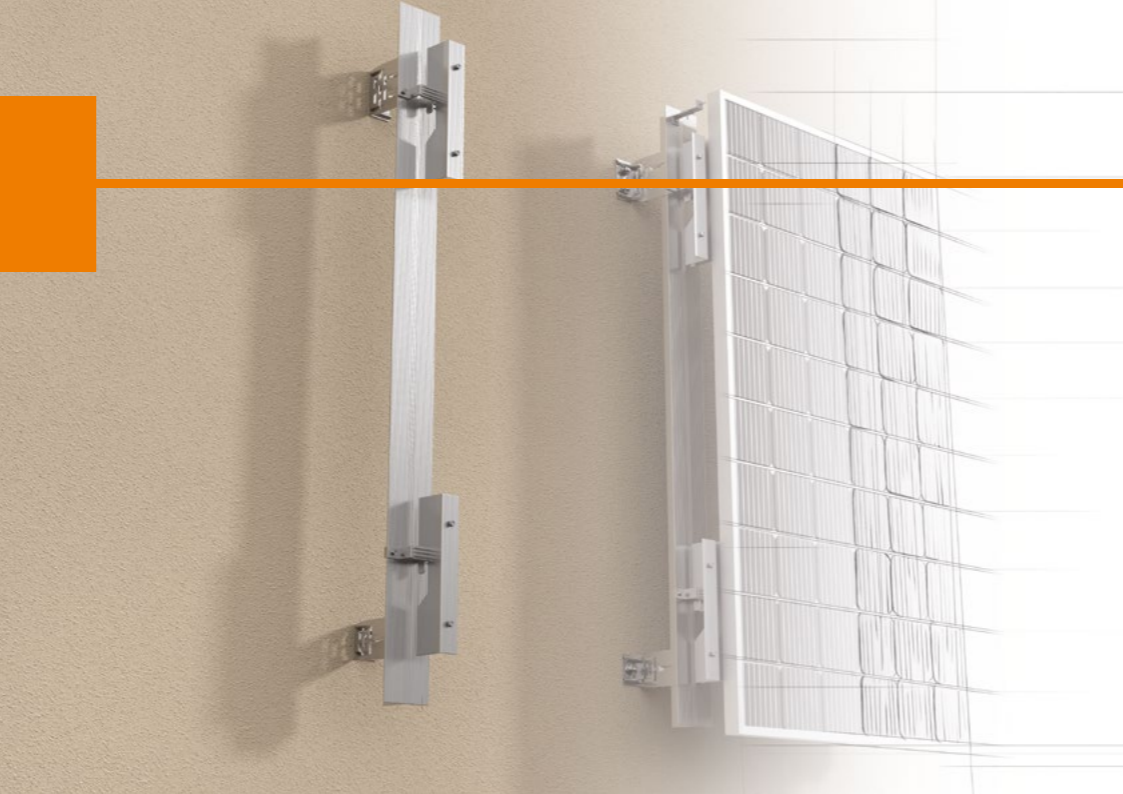

a **10-year guarantee**
for the systems




**improved air
circulation**



**any layout
of the modules**



structures adopted
to **glass-glass modules**

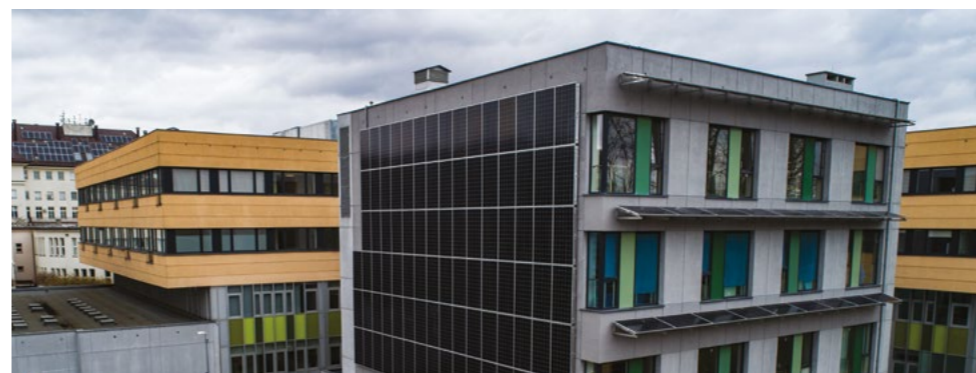

Customised SYSTEMS



► Customised systems

We manufacture many non-standard systems, not available anywhere else in the market. We develop each system individually, with a support of well-qualified engineers, so each design is optimised in terms of a layout of modules.





Completed FREESTANDING PROJECTS




Completed FREESTANDING PROJECTS





Completed ROOF PROJECTS

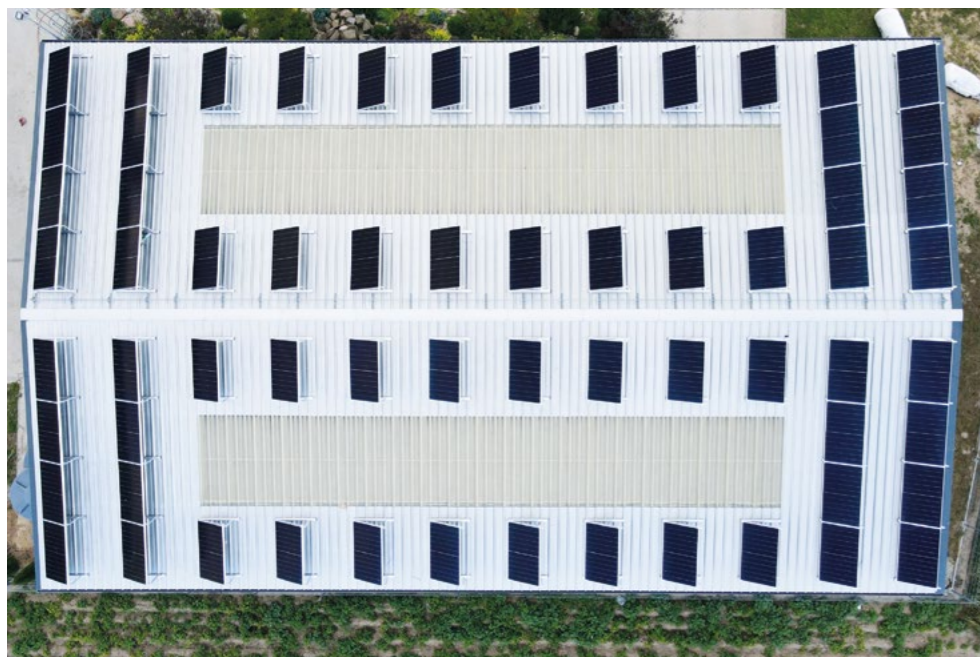

Completed ROOF PROJECTS





Completed AUTOBOX AND FAÇADES PROJECTS





Energy5 Sp. z o.o. registered office
Ziejkowa 5
09-500 Gostynin
POLAND

Branch in Brześć Kujawski
Kolejowa 15-17
87-880 Brześć Kujawski
POLAND

biuro@energy5.pl
+48 (24) 235 40 79

Jacek Lipowski
Export Sales Director

+48 694 923 357
jlipowski@energy5.pl

Tomasz Aleksander
Deputy Export Sales Director

+48 882 493 692
taleksander@energy5.pl

Jan Brejcha
Country Manager

+48 604 277 420
jbrejcha@energy5.pl

