


PITCHED ROOF

ROOF COVERED WITH SHEET METAL JOINED WITH A SEAM - VERTICAL INSTALLATION


Vertical mounting to a pitched roof using a seam hook - DS.R.1V

Technical specification


System material	aluminium and stainless steel
Type of roof	pitched roof
Module orientation	vertical
Assembly system	on the long side on a seam hook 501.026
Roof surface for 1 kW	6,65 m ² (for module 1650x992)
Roof load (system without modules)	16,6 kg/kW 2,5 kg/m ²

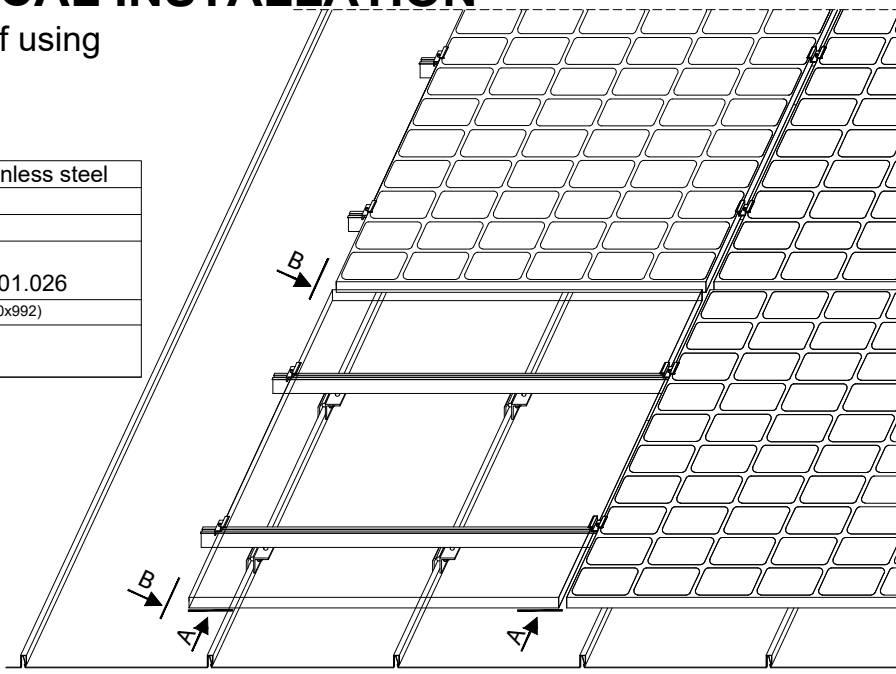

CROSS-SECTION A-A

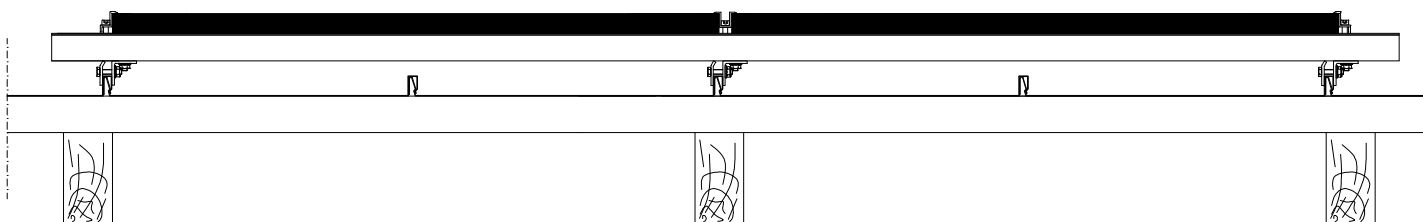


CROSS-SECTION B-B

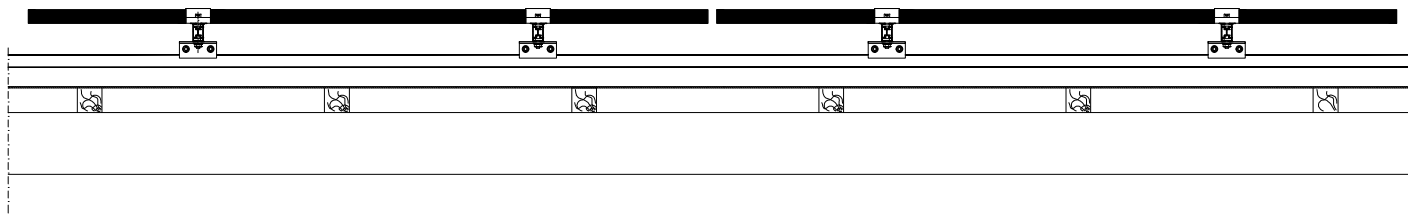


end clamp 102.003
 allen screw 202.003
 T-nut 203.001



middle clamp 102.001
 allen screw 202.003
 T-nut 203.001



flat seam hook 501.026



mounting rail
 38x45 101.001

